






 **MARCHER**[®]
OFF-HIGHWAY TIRE SOLUTION PROVIDER

OFF-HIGHWAY TIRE

SOLUTION PROVIDER



CONTENTS


- 01  CONSTRUCTION TIRES 01-05
- 02  OTR TIRES 06-19
- 03  AGRICULTURAL TIRES 20-30
- 04  SOLID TIRES 31-34
- 05  RELATIVE PRODUCTS 34



 TIRE ON EQUIPMENT 



Step1 **Step2** **Step3** **Step4** **Step5**

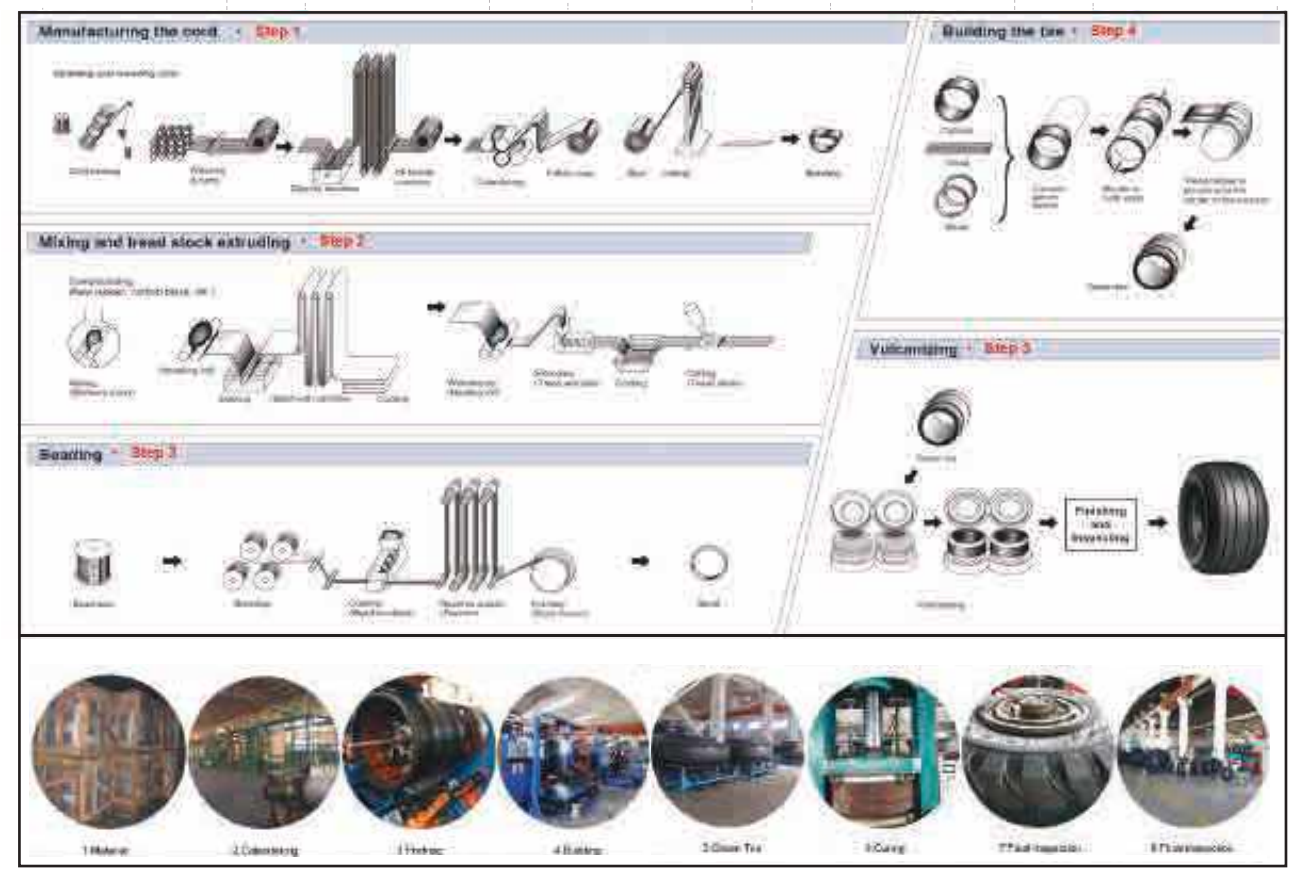

PRODUCE QUALITY TIRE RUN ALL OVER THE WORLD

Currently, annual production capacity is 100,000 sets of OTR tires along with 8,000 giant tires and 20,000 radial, 400,000 sets of construction and industrial tires, including 10,000 radial, 200,000 sets of agricultural tires, comprising 50,000 radial and 10,000 forestry tires, 800,000 solid tires.



Headquartered in Qingdao of China, QINGDAO QIZHOU RUBBER CO., LTD (MARCHER) is a leading manufacturer and player in the global Off-Highway tire market. Since 1998, (MARCHER) has achieved the 93,000-square-meter factory consisting of R&D department and over 62,000 square meters for production plant in Qianlou Rubber Industrial Park of Qingdao, China.



All tires produced by (MARCHER) are in full compliance with international manufacturing and management standards & regulations, including ISO9001, US DOT and the national CCC, European Directive REACH, E-MARK, etc. They have successfully been operated in more than 100 countries & regions, and already proved by Rio Tinto & FMG in Australia, and Shenhua Group of China, etc.



With "All-for-Durable" and environmental-friendly design philosophy, (MARCHER) is offering the most integrated production line, for equipment in agricultural, construction and industrial events as well as earthmoving, port and mining, and gardening applications. Believing in particularity, honesty and friendship, we are always ready to run all over the world.



HAL5 L-5

- Applications: skid steer equipment in scrap yards, recycling operations, mining, etc.
- Excellent cut, chip and tear resistance suitable for rough and hard concrete surface.
- The deep tread providing an extended tire life-cycle and excellent sidewall protection.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW	OD		10km/h	10km/h
10-16.5	10	8.25	TL	35.0	264	773	2135	520	
	12	8.25	TL	35.0	264	773	2375	620	
12-16.5	12	9.75	TL	35.0	307	831	2865	550	
	14	9.75	TL	35.0	307	831	3075	620	



HUL5 L-5

- Applications: skid steer, backhoe loader, telehandler, mining, rock service.
- The special tread compound leading to exceptional cut and chip resistance along with excellent wear resistance on all types of terrains.
- The extra deep tread with wider and sturdier blocks providing best traction, stability, and puncture resistance.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	Max Speed (km/h)
					SW	OD			
10-16.5	10	8.25	TL	27.0	264	773	2135	520	10
12-16.5	12	9.75	TL	33.0	307	831	2865	550	10
14-17.5	14	10.50	TL	37.0	349	921	3875	550	10
15-19.5	14	11.75	TL	37.0	389	1019	4565	480	10
19.5L-24	14	16.00	TL	37.0	513	1333	5200	480	10
19.5L-24	14	16.00	TL	37.0	513	1333	3447	235	40
16.9-28	14	DW15	TL	27.0	430	1435	3765	300	40



HXL5 L-5

- Applications: skid steer, backhoe loader, telehandler, mining, rock service
- The special tread compound leading to exceptional cut and chip resistance along with excellent wear resistance on all types of terrains
- The extra deep tread with wider and sturdier blocks providing best traction, stability, and puncture resistance

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	Max Speed (km/h)
					SW	OD			
10-16.5	12	8.25	TL	35.0	264	785	2375	620	10
12-16.5	14	9.75	TL	35.0	305	856	3075	620	10



TRENK I-3

- Applications: trencher equipment, aerial work platform, portable forklift in lawn & garden.
- Best suited for applications on wet and dry surfaces.
- Large contact area to provide best traction and low pressure.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW	OD		50km/h	50km/h
26x12.00-12	10	10.50	TL	18.0	307	648	1630	450	
29x12.5-15	8	10.50	TL	20.0	330	730	1080	310	
31x15.50-15 (400/50-15)	8	13LBx15	TL	22.0	391	792	1250	310	
	10	13LBx15	TL	22.0	391	792	1450	410	
	12	13LBx15	TL	22.0	391	792	1650	510	



IMPF3 F-3

- Applications: 2-wheel drive backhoe front, soil tillage operation, implement machinery, trailer.
- INDUSTRIAL RIB F3 is an agro-industrial rib-pattern tire designed for field and road transport.
- Provides excellent traction on hard soil, asphalt and concrete.
- Shock-fortified nylon-cord body resists impacts, cuts and punctures.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW	OD		30km/h	30km/h
11L-15	10	8LB	TL	13.5	280	810	1190	340	
11L-16	10	8LB	TL	13.5	280	835	1240	340	
14.5/75-16.1	10	11LB	TL	17.0	375	920	1450	280	



SLR4A R-4

- Applications: backhoe front, telehandler, compact loader, compact dumper.
- EXTRA HEAVY CASING-Provides increased durability, larger cut and chip resistance, and extended service life.
- SPEPPED REINFORCED LUGS-Provides excellent stability, traction and self-cleaning.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW	OD		30km/h	30km/h
10.5/80-18	10	W9	TL	22.0	274	885	1935	370	
	12	W9	TL	22.0	274	885	2160	430	
12.5/80-18	12	W9	TL	27.0	308	965	2625	370	
	14	W9	TL	27.0	308	965	2870	430	



SLR4 R-4

- Applications: backhoe loader, telehandler, tractor.
- Particularly designed for digging and loading operations as well as municipality and maintenance applications.
- EXTRA HEAVY CASING-Provides increased durability, larger cut and chip resistant, and extended service life.
- SPEPPED REINFORCED LUGS-Provides excellent stability, traction and self-cleaning.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW	OD		40km/h	40km/h
14.9-24	12	W13	TL	26.0	378	1265	2900	290	
16.9-24	12	W15L	TL	26.0	430	1335	3250	260	
16.9-28	12	W14L	TL	26.0	430	1435	3450	260	
16.9-30	12	DW15L	TL	27.0	440	1470	3650	255	
18.4-24	12	W16L	TL	27.0	467	1374	3750	250	
18.4-26	12	W16L	TL	27.0	467	1426	3875	250	
18.4-28	12	W16L	TL	27.0	467	1477	4000	250	
18.4-30	12	DW16L	TL	27.0	467	1510	4125	250	
17.5L-24	12	W15L	TL	26.0	445	1245	3170	260	
19.5L-24	12	W16L	TL	27.0	495	1314	3450	230	
21L-24	12	DW18A	TL	27.0	553	1378	3875	220	
21L-28	12	W18L	TL	27.0	550	1530	4000	210	



DFMP L-3

- Applications: telehandler and backhoe loader.
- Increased tire life-environmentally friendly.
- Protective shoulder rib and low profile vertical sidewall reducing sidewall damage.
- Non-directional tread pattern reducing inventory carrying costs.
- New tread design reducing ground compaction and surface pressure on hard surfaces.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW	OD		10km/h	10km/h
370/75-28	14	11.00	TL	34.0	368	1278	5450	500	
	16	11.00	TL	34.0	368	1278	5950	575	
400/75-28	16	12.00	TL	34.0	399	1328	6500	525	
	18	12.00	TL	34.0	399	1328	7000	600	



TIMP R-1

- Applications: multipurpose truck (MPT), tractor, telehandler, backhoe loader, compact loader.
- Traction pattern, suitably designed for on and off-the road use, in all weather conditions particularly suitable for operations on muddy ground.
- Patterns design and strong carcass engineered to provide excellent traction to drive wheels, self-cleaning properties and extra cut-chip resistance.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW	OD		30km/h	30km/h
11.0/65-12	8	9	TT/TL	28.0	273	700	1250	400	
15.5/80-24 (400/80-24)	12	W13	TL	35.0	394	1240	2900	300	
	14	W13	TL	35.0	394	1240	3150	350	
	16	W13	TL	35.0	394	1240	3300	400	



SKS204 L-4

- Applications: skid steer, aerial boom lift, scissor lift, compact tractor, front backhoe, 3-wheel forklift
- The ideal tire for loose surfaces and heavy-duty service
- The extra deep tread and sidewall protection providing excellent cut and chip resistance and outstanding durability

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW	OD		10km/h	10km/h
10-16.5	12	8.25	TL	23.0	264	773	2135	520	
12-16.5	14	9.75	TL	23.0	307	831	2885	550	



INTR1 R-1

- Applications: MPT, 2WD-tractor, telehandler, backhoe loader, compact loader.
- An agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size.
- Traction pattern, suitably designed for on and off-the road use, in all weather conditions.
- Patterns engineered to provide excellent traction to drive wheels and excellent self-cleaning properties.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW (mm)	OD		30km/h	30km/h
10.0/75-15.3	10	9.00	TL	28.0	264	760	1525	390	
11.5/80-15	12	8.00	TL	28.0	290	865	2145	410	
11.5/80-15.3	12	9.00	TL	28.0	290	865	2145	410	
12.5/80-15.3	14	9.00	TL	28.0	307	925	2425	410	



INTR4 R-4/I-3

- Applications: MPT, 2WD-tractor, telehandler, backhoe loader, compact loader.
- An agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size.
- Traction pattern, suitably designed for on and off-the road use, in all weather conditions.
- Patterns engineered to provide excellent traction to drive wheels and excellent self-cleaning properties.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW (mm)	OD		40km/h	40km/h
405/70-20	14	13.00	TL	30.0	410	1075	3750	350	
(16/70-20)	16	13.00	TL	30.0	410	1075	3970	400	
405/70-24	14	13.00	TL	30.0	410	1175	3950	350	
(16/70-24)	16	13.00	TL	30.0	410	1175	4170	400	
18-19.5	16	14.00	TL	24.0	460	1105	4700	600	
(445/65D19.5)	18	14.00	TL	24.0	460	1105	5460	725	



NMT IND-3

- All-terrain tire suitable for military vehicles, such as nuclear material transporter.
- Energy-saving rolling resistance, low temperature sensitivity, good stability, good traction, enhanced riding comfort.
- Cushioned compound and shock resistance.
- Reduced wear for longer life, improved mobility.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW (mm)	OD		40km/h	40km/h
355/65-15(350-15)	24	9.75x15	TL	23.0	372	861	6000	1000	



FM101

- Applications: multipurpose truck (MPT), tractor, telehandler, backhoe loader, compact loader, logging
- Traction pattern, suitably designed for on and off-the road use, in all weather conditions particularly suitable for operations on muddy ground
- Patterns design and strong carcass engineered to provide excellent traction to drive wheels, self-cleaning properties and extra cut-chip resistance

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW (mm)	OD		30km/h	30km/h
18-15.5	14	13.0	TL	28.0	450	980	4185	350	



TM880

- Applications: MPT, 2WD-tractor, telehandler, backhoe loader, compact loader
- An agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size
- Traction pattern, suitably designed for on and off-the road use, in all weather conditions
- Patterns engineered to provide excellent traction to drive wheels and excellent self-cleaning properties

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW (mm)	OD		30km/h	30km/h
405/70-20	14	13.00	TL	30.0	410	1075	3250	350	
(16/70-20)	14	13.00	TL	30.0	410	1175	3550	350	



DUMAX568 L-3

- Applications: loader, dozer used in construction stockpile & truck-loading.
- Radial design producing good ground grasping and traction in harsh condition, such as construction area, mine sites, quarry, etc.
- Excellent traction and stability, delivering exceptional operator comfort.
- Excellent resistance to damage and longer life.

Size	SR	Load Index	RIM	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Capacity (kg)	Inflation Pressure (kpa)	
						SW (mm)	OD		10km/h	10km/h
15.5R25	★★	176A2	12.00/1.3	TL	24.0	395	1275	7100	650	
17.5R25	★★	182A2	14.00/1.5	TL	26.0	420	1348	8500	650	
20.5R25	★★	193A2	17.00/2.0	TL	28.5	512	1517	11500	650	
23.5R25	★★	201A2	19.50/2.5	TL	32.0	590	1610	14500	650	
26.5R25	★★	209A2	22.00/3.0	TL	35.0	673	1750	18500	650	
29.5R25	★★	216A2	25.00/3.5	TL	38.0	749	1874	22400	650	



W-1 E-3/L-3

- Applications: loader, dozer, earthmover, grader, scraper operating under the relatively severe conditions.
- The tread compound providing cut-and-chip-resistant properties and suites best for loading and dozing operations.
- Aggressive, durable lug design, non-directional tread design and wide base construction, which can provide high flotation, excellent traction, improved stability and reduced ground pressure.
- The specially-formulated synthetic rubber compound can offer excellent cutting and heat resistance and help to prevent sidewall cracking.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW (mm)	OD		10km/h*50km/h	10km/h*50km/h
13.00-24	12	10.00	TT/TL	24.0	350	1350	5600*3000	450*300	
14.00-24	16	10.00	TT/TL	25.5	375	1370	7300*4000	550*375	
	20	10.00	TT/TL	25.5	375	1370	8500*4625	700*475	
	24	10.00	TT/TL	25.5	375	1370	9500*5150	850*575	
	28	10.00	TT/TL	25.5	375	1370	10000*5600	925*650	
14.00-25	32	10.00	TT/TL	25.5	375	1370	10900*6150	1050*750	
	16	10.00/1.5	TT/TL	25.5	375	1370	7300*4000	550*375	
	20	10.00/1.5	TT/TL	25.5	375	1370	8500*4625	700*475	
	24	10.00/1.5	TT/TL	25.5	375	1370	9500*5150	850*575	
16.00-24	28	10.00/1.5	TT/TL	25.5	375	1370	10000*5600	925*650	
	32	10.00/1.5	TT/TL	25.5	375	1370	10900*6150	1050*750	
	24	11.25/2.0	TT/TL	28.5	430	1495	10600*6000	650*475	
	28	11.25/2.0	TT/TL	28.5	430	1495	11500*6700	750*575	
16.00-25	32	11.25/2.0	TT/TL	28.5	430	1495	12500*7300	875*650	
	24	11.25/2.0	TT/TL	28.5	430	1495	10600*6000	650*475	
	28	11.25/2.0	TT/TL	28.5	430	1495	11500*6700	750*575	
18.00-24	32	11.25/2.0	TT/TL	28.5	430	1495	12500*7300	875*650	
	24	13.00/2.5	TT/TL	31.5	500	1615	12500*7300	550*425	
	28	13.00/2.5	TT/TL	31.5	500	1615	13600*8000	650*500	
	32	13.00/2.5	TT/TL	31.5	500	1615	15000*8750	750*575	
18.00-25	36	13.00/2.5	TT/TL	31.5	500	1615	16000*9250	850*625	
	40	13.00/2.5	TT/TL	31.5	500	1615	17000*9700	950*700	
	24	13.00/2.5	TT/TL	31.5	500	1615	12500*7300	550*425	
	28	13.00/2.5	TT/TL	31.5	500	1615	13600*8000	650*500	
17.5-25	32	13.00/2.5	TT/TL	31.5	500	1615	15000*8750	750*575	
	36	13.00/2.5	TT/TL	31.5	500	1615	16000*9250	850*625	
	40	13.00/2.5	TT/TL	31.5	500	1615	17000*9700	950*700	
	16	14.00/1.5	TT/TL	25.5	445	1350	7300*4250	475*300	
20.5-25	20	14.00/1.5	TT/TL	25.5	445	1350	8250*5000	575*400	
	24	14.00/1.5	TT/TL	25.5	445	1350	9250*5600	700*475	
	16	17.00/2.0	TT/TL	30.0	520	1490	8250*5450	350*275	
23.5-25	20	17.00/2.0	TT/TL	30.0	520	1490	9500*6000	450*325	
	24	17.00/2.0	TT/TL	30.0	520	1490	10300*6700	525*400	
	16	19.50/2.5	TT/TL	31.5	595	1615	9500*6150	300*225	
26.5-25	20	19.50/2.5	TT/TL	31.5	595	1615	10900*7300	375*300	
	24	19.50/2.5	TT/TL	31.5	595	1615	12500*8000	475*350	
	28	19.50/2.5	TT/TL	31.5	595	1615	13600*8750	550*400	
	24	22.00/3.0	TT/TL	35.0	675	1750	14000*9250	400*300	
29.5-25	28	22.00/3.0	TT/TL	35.0	675	1750	15500*10000	475*350	
	32	22.00/3.0	TT/TL	35.0	675	1750	17000*11200	550*425	
	28	25.00/3.5	TL	38.0	750	1875	17500*11500	425*325	
29.5-29	34	25.00/3.5	TL	38.0	750	1875	20000*12950	525*400	
	28	25.00/3.5	TL	38.0	750	1975	19000*12150	425*325	
16/70-20	34	25.00/3.5	TL	38.0	750	1975	21200*14000	525*400	
	14	13.00	TT/TL	23.0	410	1075	5150*2900	430*350	
16/70-24	14	13.00	TT/TL	25.0	410	1175	5600*3350	450*350	



W-2 E-3/L-3

- Applications: loader, dozer, earthmover, grader, scraper operating under the relatively severe conditions.
- BLOCK PATTERN TYRE SERIES suitable to be operated under many conditions.
- Aggressive, durable lug design, non-directional tread design and wide base construction, can provide high flotation, excellent traction, improved stability and reduced ground pressure.
- The specially-formulated synthetic rubber compound can offer excellent cutting and heat resistance and help to prevent sideways cracking.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h*50km/h	10km/h*50km/h	10km/h	
16.00-24	24	11.25/2.0	TT/TL	28.5	430	1495	10600*6000	650*475		
	28	11.25/2.0	TT/TL	28.5	430	1495	11500*6700	750*575		
	32	11.25/2.0	TT/TL	28.5	430	1495	12500*7300	875*650		
16.00-25	24	11.25/2.0	TT/TL	28.5	430	1495	10600*6000	650*475		
	28	11.25/2.0	TT/TL	28.5	430	1495	11500*6700	750*575		
	32	11.25/2.0	TT/TL	28.5	430	1495	12500*7300	875*650		
18.00-24	24	13.00/2.5	TT/TL	31.5	500	1615	12500*7300	550*425		
	28	13.00/2.5	TT/TL	31.5	500	1615	13600*8000	650*500		
	32	13.00/2.5	TT/TL	31.5	500	1615	15000*8750	750*575		
	36	13.00/2.5	TT/TL	31.5	500	1615	16000*9250	850*625		
18.00-25	24	13.00/2.5	TT/TL	31.5	500	1615	12500*7300	550*425		
	28	13.00/2.5	TT/TL	31.5	500	1615	13600*8000	650*500		
	32	13.00/2.5	TT/TL	31.5	500	1615	15000*8750	750*575		
	36	13.00/2.5	TT/TL	31.5	500	1615	16000*9250	850*625		
15.5-25	12	12.00/1.3	TT/TL	24.0	395	1275	5600*3250	400*250		
	16	12.00/1.3	TT/TL	24.0	395	1275	6500*3750	525*325		
	17.5-25	16	14.00/1.5	TT/TL	24.0	445	1350	7300*4250	475*300	
		20	14.00/1.5	TT/TL	24.0	445	1350	8250*5000	575*400	
20.5-25	16	17.00/2.0	TT/TL	29.0	520	1490	8250*5450	350*275		
	20	17.00/2.0	TT/TL	29.0	520	1490	9500*6000	450*325		
	24	17.00/2.0	TT/TL	29.0	520	1490	10300*6700	525*400		
23.5-25	16	19.50/2.5	TT/TL	30.0	595	1615	9500*6150	300*225		
	20	19.50/2.5	TT/TL	30.0	595	1615	10900*7300	375*300		
	24	19.50/2.5	TT/TL	30.0	595	1615	12500*8000	475*350		
	28	19.50/2.5	TT/TL	30.0	595	1615	13600*8750	550*400		
26.5-25	24	22.00/3.0	TT/TL	32.0	675	1750	14000*9250	400*300		
	28	22.00/3.0	TT/TL	32.0	675	1750	15500*10000	475*350		
	32	22.00/3.0	TT/TL	32.0	675	1750	17000*11200	550*425		
29.5-25	28	25.00/3.5	TL	32.0	750	1875	17500*11500	425*325		
	34	25.00/3.5	TL	36.0	750	1875	20000*12950	525*400		
29.5-29	28	25.00/3.5	TL	36.0	750	1975	19000*12150	425*325		
	34	25.00/3.5	TL	36.0	750	1975	21200*14000	525*400		



W-3A E-2

- Applications: excavators in road construction works, soft and muddy ground.
- Wide tread pattern providing good floating and excellent driving properties.
- The strong casing providing extraordinary resistance to impacts and shocks even in heavy-duty operations.
- Special tread compound producing particular resistance to cuts and snags, extremely strong traction, good self-cleaning.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)
					SW	OD	10km/h*50km/h	10km/h*50km/h	10km/h
9.00-20	14	7.00	TT	22.0	262	1024	4385*2770	760*720	
	16	7.00	TT	22.0	262	1024	4745*3000	830*790	
	18	7.00	TT	22.0	262	1024	5105*3230	910*870	
10.00-20	16	7.50	TT	23.0	280	1060	4945*3230	720*690	
	18	7.50	TT	23.0	280	1060	5195*3365	860*820	
	20	7.50	TT	23.0	280	1060	5445*3505	910*860	
11.00-20	16	8.00	TT	29.5	296	1100	5405*3555	760*720	
	18	8.00	TT	29.5	296	1100	5805*3850	860*820	
	20	8.00	TT	29.5	296	1100	6205*4150	910*870	



DUMAX 668 L-3

- Applications: loader, dozer used in construction stockpile & truck-loading
- Radial design producing good ground grasping and traction in harsh condition, such as construction area, mine sites, quarry, etc.
- Excellent traction and stability, delivering exceptional operator comfort
- Excellent resistance to damage and longer life

Size	SR	Load Index	RIM	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
						SW	OD	10km/h	10km/h	Single	Double
15.5R25	★★	176A2	12.00/1.3	TL	26.0	394	1275	7100	650		
17.5R25	★★	182A2	14.00/1.5	TL	27.5	445	1348	8500	650		
20.5R25	★★	193A2	17.00/2.0	TL	30.5	521	1493	11500	650		
23.5R25	★★	201A2	19.50/2.5	TL	33.5	597	1617	14500	650		
26.5R25	★★	209A2	22.00/3.0	TL	36.5	673	1750	18500	650		
29.5R25	★★	216A2	25.00/3.5	TL	40.0	749	1874	22400	650		



W-3B E-3

- Applications: heavy duty excavator and forklift in road construction works, soft and muddy ground, crane on road and port.
- Wide tread pattern providing good floating and excellent driving properties, speeding up to 70km/h.
- The strong casing providing extraordinary resistance to impacts and shocks even in heavy-duty operations.
- Special tread compound producing particular resistance to cuts and snags, extremely strong traction, good self-cleaning.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	70km/h	70km/h	70km/h	70km/h
9.00-20	16	7.00	TT	25.0	259	1038	3000	790		
	18	7.00	TT	25.0	259	1038	3230	870		
10.00-20	18	7.50	TT	30.0	278	1073	3365	820		
	20	7.50	TT	30.0	278	1073	3505	860		
11.00-20	18	8.00	TT	29.5	296	1100	3850	820		
	20	8.00	TT	29.5	296	1100	4150	870		



W-3C E-3

- Applications: heavy duty excavator and forklift in road construction works, Timber Truck soft and muddy ground, and highway crane on road and port Also Forest Area .
- Wide tread pattern providing good floating and excellent driving properties, speeding up to 70km/h.
- The strong casing providing extraordinary resistance to impacts and shocks even in heavy-duty operations.
- Special tread compound producing particular resistance to cuts and snags, extremely strong traction, good self-cleaning.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	70km/h	70km/h	70km/h	70km/h
12.00-24	20	8.50	TT	22.0	316	1130	3750	550		
	24	8.50	TT	22.0	316	1130	4350	600		



W-3D G-2

- Applications: scraper and motor grader in city and country maintenance work, construction and mine applications.
- Pattern design producing excellent traction and self-cleaning features.
- A special compound enabling an extended tire life-cycle and heavy-duty service.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h*40km/h	10km/h*40km/h	10km/h*40km/h	10km/h*40km/h
13.00-24	12	8.00	TT/TL	25.0	335	1275	5600*2725	450*300		
	16	8.00	TT/TL	25.0	335	1275	6500*3275	600*425		
14.00-24	12	8.00	TT/TL	25.0	360	1345	6300*3075	425*275		
	16	8.00	TT/TL	25.0	360	1345	7300*3650	550*375		
16.00-24	16	10.00VA	TT/TL	28.5	425	1460	8250*4500	425*325		



W-3DN G-2

- Applications: scraper and motor grader in city and county maintenance work, construction and mine applications.
- The stronger, larger and more durable casing designed to extend life service and maximize equipment capacities, than W-3D.
- Pattern design producing excellent traction and self-cleaning features .

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h*40km/h	10km/h*40km/h	10km/h*40km/h	10km/h*40km/h
13.00-24	12	8.00	TT/TL	28.0	366	1298	5600*2725	450*300		
	16	8.00	TT/TL	28.0	366	1298	6500*3275	600*425		
14.00-24	12	8.00	TT/TL	28.0	398	1370	6300*3075	425*275		
	16	8.00	TT/TL	28.0	398	1370	7300*3650	550*375		



X-TRAC

- Radial design producing good ground grasping and traction in harsh condition, such as construction area, mine sites, quarry, etc.
- The large transverse pattern gives the tire strong driveability and braking performance.
- Have excellent grip performance on soft ground.
- The design of the reinforcing ribs between the shoulder blocks can effectively inhibit the root cracks of the blocks.

Size	PR	Load Index	Rim	Speed Level	Tube Type	Tread Depth (mm)	Tread width (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
								SW (mm)	OD (mm)	Single	Double	Single	Double
14.00R20	20	164/161	10.00	G	TT/TL	20.0	310.0	375	1240	5000	4625	790	790
16.00R20	22	174/171	11.25	G	TT/TL	21.0	380.0	438	1309	6700	6150	760	760

W-3E G-2



- Applications: scraper and motor grader in city and county maintenance work, construction and mine applications.
- Precision-angled bars maximizing traction in soft soil and providing long wear.
- Open shoulder grooves providing self-cleaning, excellent traction and less slipping.
- Tough and durable casing producing the most widely retreaded tire in the industry.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	40km/h	40km/h	40km/h	40km/h
15.5-25	12	12.00/1.3	TT/TL	23.5	395	1275	2650	225		
	16	12.00/1.3	TT/TL	23.5	395	1275	3200	325		
17.5-25	12	14.00/1.5	TT/TL	23.0	445	1350	2900	200		
	16	14.00/1.5	TT/TL	23.0	445	1350	3350	275		
	20	14.00/1.5	TT/TL	23.0	445	1350	3650	325		
20.5-25	12	17.00/2.0	TT/TL	26.5	520	1490	3550	175		
	16	17.00/2.0	TT/TL	26.5	520	1490	4000	225		
	20	17.00/2.0	TT/TL	26.5	520	1490	4500	275		
23.5-25	12	19.00/2.5	TT/TL	30.5	595	1615	4000	150		
	16	19.00/2.5	TT/TL	30.5	595	1615	4750	200		
	20	19.00/2.5	TT/TL	30.5	595	1615	5450	250		

W-3EN G-2



- Applications: scraper and motor grader in city and county maintenance work, construction and mine applications.
- The strong, larger and durable casing designed to extend life service and maximize equipment capacities.
- Pattern design producing excellent traction and self-cleaning features.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	40km/h	40km/h	40km/h	40km/h
17.5-25	12	14.00/1.5	TT/TL	26.0	464	1366	2900	200		
	16	14.00/1.5	TT/TL	26.0	464	1366	3350	275		
	20	14.00/1.5	TT/TL	26.0	464	1366	3650	325		

W-4 E-4/IND-4



- Applications: Port Equipment, including Empty Container Handler, Reach Stacker, Straddle & Shuttle Carrier, Rubber.
- Tyre Gantry (RTG), Automated Guide Vehicles (AGV), Harbour Mobile Crane (HMC) .
- Special compound and design suitable for handling equipment operating in airport, yard, port and so on.
- Deep tread pattern and wide riding area providing good cutting and wear resistances, improving ride properties on gravel road.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h*30km/h	10km/h*30km/h	10km/h*25km/h	10km/h*25km/h
12.00-24	16	8.50	TT/TL	35.0	335	1272	6250*3250	575*450		
	20	8.50	TT/TL	35.0	335	1272	6900*3650	825*550		
	24	8.50	TT/TL	35.0	335	1272	7600*4000	975*650		
	28	8.50	TT/TL	35.0	335	1272	8250*4300	1075*750		
14.00-24	20	10.00W	TT/TL	44.5	404	1412	8500*4625	700*475		
	24	10.00W	TT/TL	44.5	404	1412	9500*5150	850*575		
	28	10.00W	TT/TL	44.5	404	1412	10000*5600	925*650		
	32	10.00W	TT/TL	44.5	404	1412	10400*5950	1000*725		
14.00-25	20	10.00	TT/TL	44.5	406	1412	8500*4625	700*475		
	24	10.00	TT/TL	44.5	406	1412	9500*5150	850*575		
	28	10.00	TT/TL	44.5	406	1412	10000*5600	925*650		
	32	10.00	TT/TL	44.5	406	1412	10900*6150	1050*750		
16.00-25	28	11.25/2.0	TT/TL	50.0	430	1495	11500*6700	750*575		
	32	11.25/2.0	TT/TL	50.0	430	1495	12500*7300	875*650		
	36	11.25/2.0	TT/TL	50.0	430	1495	13600*7750	975*725		
	40	11.25/2.0	TT/TL	50.0	430	1495	14500*8150	1075*775		
18.00-25	28	13.00/2.5	TL	54.0	500	1615	13600*8000	650*500		
	32	13.00/2.5	TL	54.0	500	1615	15000*8750	750*575		
	36	13.00/2.5	TL	54.0	500	1615	16000*9250	850*625		
	40	13.00/2.5	TL	54.0	500	1615	17000*9750	950*700		
	48	13.00/2.5	TL	54.0	500	1615	19000*10250	1100*900		
21.00-25	28	15.00	TL	57.0	570	1800	16500*9500	575*425		
	32	15.00	TL	57.0	570	1800	17500*10300	650*500		
	36	15.00	TL	57.0	570	1800	19500*10900	750*550		
	40	15.00	TL	57.0	570	1800	20600*11800	805*625		
24.00-29	30	17.00	TL	54.0	655	1975	21800*12500	525*400		
	36	17.00	TL	54.0	655	1975	24600*14000	625*475		
	42	17.00	TL	54.0	655	1975	27400*15900	725*550		
	48	17.00	TL	54.0	655	1975	30200*16400	825*625		
18.00-33	32	13.00/2.5	TL	53.5	500	1820	17500*10000	750*575		
	36	13.00/2.5	TL	53.5	500	1820	18500*10600	825*625		
	42	13.00/2.5	TL	53.5	500	1820	20000*11500	975*725		
	44	13.00/2.5	TL	53.5	500	1820	21000*12100	1050*775		

W-4A E-4



- Applications: heavy dump truck & scraper operation on relatively tough road surface in areas like mining areas, tunnel, quarry, construction site, etc.
- Deep tread pattern and wide riding area providing good cutting and wear resistances, improving ride properties on gravel road.
- Special compound and design extending the tire service life.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h*50km/h	10km/h*50km/h	10km/h*50km/h	10km/h*50km/h
18.00-33	32	13.00/2.5	TL	53.5	500	1820	17500*10000	750*575		
	36	13.00/2.5	TL	53.5	500	1820	18500*10600	825*625		
	42	13.00/2.5	TL	53.5	500	1820	20000*11500	975*725		
16.00-25	28	11.25/2.0	TL	50.0	430	1495	11500*6700	750*575		
	32	11.25/2.0	TL	50.0	430	1495	12500*7300	875*650		
	36	11.25/2.0	TL	50.0	430	1495	13600*7750	975*725		
	40	11.25/2.0	TL	50.0	430	1495	14500*8150	1075*775		
18.00-25	28	13.00/2.5	TL	54.0	500	1615	13600*8000	650*500		
	32	13.00/2.5	TL	54.0	500	1615	15000*8750	750*575		
	36	13.00/2.5	TL	54.0	500	1615	16000*9250	850*625		
	40	13.00/2.5	TL	54.0	500	1615	17000*9750	950*700		
	48	13.00/2.5	TL	54.0	500	1615	19000*10250	1100*900		
	21.00-25	28	15.00	TL	57.0	570	1800	16500*9500	575*425	
21.00-33	32	15.00	TL	57.0	570	1800	17500*10300	650*500		
	36	15.00	TL	57.0	570	1800	19500*10900	750*550		
	40	15.00	TL	57.0	570	1800	20600*11800	805*625		
	54	15.00	TL	54.0	570	1955	22400*12400	775*625		
21.00-35	36	15.00/3.0	TL	54.0	570	2005	23000*12850	750*550		
	40	15.00/3.0	TL	54.0	570	2005	24300*14000	825*625		
	44	15.00/3.0	TL	54.0	570	2005	25000*14500	900*675		
24.00-35	42	15.00/3.0	TL	57.0	653	2130	29000*16500	750*550		
	48	15.00/3.0	TL	57.0	653	2130	31500*18500	850*650		

HPu 777



- Applications: underground mining and port equipment, including Straddle & Shuttle Carrier, RTG Reach Stacker, Empty Container Handler, AGV, HMC, LHD
- Deep tread, the extra thick sidewall and the tough casing providing exceptional durability minimizing the risk of punctures and accidental damages
- Excellent cut and chip resistance, which is particularly suitable for rough and hard surfaces
- Specially designed rim guard ensuring protection against flats and wheel damage in the rim flange area
- Deeper tread making the longer service life than W-4

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h*25km/h	10km/h*25km/h	10km/h*25km/h	10km/h*25km/h
18.00-25	40	13.00/2.5	TL	67.5	530	1615	22950*21250	1150*1150		

HPu 999



- Applications: underground mining and port equipment, including Straddle & Shuttle Carrier, RTG Reach Stacker, Empty Container Handler, AGV, HMC, LHD
- Deep tread, the extra thick sidewall and the tough casing providing exceptional durability minimizing the risk of punctures and accidental damages
- Excellent cut and chip resistance, which is particularly suitable for rough and hard surfaces
- Specially designed rim guard ensuring protection against flats and wheel damage in the rim flange area
- Deeper tread making the longer service life than W-4

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h*25km/h	10km/h*25km/h	10km/h*25km/h	10km/h*25km/h
12.00-24	24	8.50	TT	37.0	335	1275	10250*9600	1000*1000		
14.00-24	28	10.00W	TT/TL	46.5	404	1412	13500*12500	1000*1000		

W-5 E-3



- Applications: heavy-duty scraper and loader operating on mining areas, tunnel, quarry, construction site, etc.
- Center riding rib providing a smooth ride and improving lateral stability.
- Deep, non-directional, rock service tread designed for the challenges of large equipment demands, such as long-time service, self-cleaning, cut resistance, etc.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h*50km/h	10km/h*50km/h	10km/h	10km/h
33.25-29	26	27.00/3.5	TL	38.0	845	2090	20600*13600	350*275		
	32	27.00/3.5	TL	38.0	845	2090	23600*15000	450*325		
33.25-35	32	27.00/3.5	TL	43.0	845	2240	25750*16000	450*325		
	38	27.00/3.5	TL	43.0	845	2240	28000*18000	550*400		
	44	27.00/3.5	TL	43.0	845	2240	32300*19800	625*475		
33.5-33	32	28.00/4.0	TL	43.0	850	2240	25750*16500	425*325		
	38	28.00/4.0	TL	43.0	850	2240	29000*18500	525*400		
	44	28.00/4.0	TL	43.0	850	2240	32300*19800	625*475		
37.25-35	36	31.00/4.0	TL	43.0	945	2390	30750*19500	450*325		
	42	31.00/4.0	TL	43.0	945	2390	33500*21800	525*400		
37.5-33	36	32.00/4.5	TL	43.0	950	2390	31500*20000	450*325		
	42	32.00/4.5	TL	43.0	950	2390	34500*22400	525*400		



W-5A L-4

- Applications: giant loader in the ore and coal mine sites.
- Extra deep tread producing excellent rock type damage resistance and long tread life.
- Open non-directional tread pattern providing all round traction with excellent self-cleaning.
- Cut Resistant Breaker (CRB) construction providing increased strength and durability without sacrificing heat resistance.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	2.5km/h*5km/h	2.5km/h*5km/h	2.5km/h*5km/h	2.5km/h*5km/h
50/80-57	68	36.00/6.0	TL	97.0	1260	3540	102800*90000	650*650		
52/80-57	72	36.00/6.0	TL	97.0	1320	3550	116300*102000	650*650		
55/80-57	72	44.00/6.0	TL	100.0	1400	3560	120000*100000	650*650		
55.5/80-57	76	44.00/6.0	TL	100.0	1400	3720	137800*117800	750*750		
53.5/85-57	76	44.00/6.0	TL	100.0	1350	3920	129200*115600	750*750		
65/65-57	62	52.00/6.0	TL	100.0	1650	3730	121300*105000	600*600		
45/65-45	58	36.00/4.5	TL	116.0	1015	2350	50000 (10km/h)	675 (10km/h)		



W-5B L-4

- Applications: giant loader in the ore and coal mine sites.
- Extra deep tread producing excellent rock type damage resistance and long tread life.
- Open non-directional tread pattern providing all round traction with excellent self-cleaning.
- Cut Resistant Breaker (CRB) construction providing increased strength and durability without sacrificing heat resistance.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	2.5km/h*5km/h	2.5km/h*5km/h	2.5km/h*5km/h	2.5km/h*5km/h
58/85-57	84	47.00/6.0	TL	100.0	1450	3928	142800*125000	790*790		
70/70-57	84	60.00/6.0	TL	100.0	1750	3928	199600*173000	800*800		



W-5C L-4

- Applications: loader and dozer in quarry and harsh pavement.
- Non-directional pattern design for heavy duty rock service.
- Ideal tire for severe operations requiring reinforced cut resistance, sidewall protection and exceptional traction, excellent tread cleaning design.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h	10km/h	10km/h	10km/h
17.5-25	16	14.00/1.5	TL	46.0	445	1400	7300	475		
	20	14.00/1.5	TL	46.0	445	1400	8250	575		
	24	14.00/1.5	TL	46.0	445	1400	9250	700		
23.5-25	20	19.50/2.5	TL	54.0	595	1615	10900	375		
	24	19.50/2.5	TL	54.0	595	1615	12500	475		

W-6 L-5



- Applications: loader & earthmover used in the harsh conditions, such as construction and mining areas.
- Extra deep tread and strong casing design providing excellent rock type damage resistance and long tread life in heavy duty.
- Open non-directional tread pattern producing all round traction with excellent self-cleaning.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h	10km/h	10km/h	10km/h
17.5-25	20	14.00/1.5	TL	62.0	445	1350	8250	575		
	24	14.00/1.5	TL	62.0	445	1350	9250	700		
20.5-25	20	17.00/2.0	TL	69.0	520	1490	9500	450		
	24	17.00/2.0	TL	69.0	520	1490	10300	525		
23.5-25	20	19.50/2.5	TL	76.0	595	1615	10900	375		
	24	19.50/2.5	TL	76.0	595	1615	12500	475		
	28	19.50/2.5	TL	76.0	595	1615	13600	550		
26.5-25	24	22.00/3.0	TL	87.0	675	1750	14000	400		
	28	22.00/3.0	TL	87.0	675	1750	15500	475		
	32	22.00/3.0	TL	87.0	675	1750	17000	550		
29.5-25	28	25.00/3.5	TL	92.0	750	1875	17500	425		
	34	25.00/3.5	TL	92.0	750	1875	20000	525		
29.5-29	28	25.00/3.5	TL	92.0	750	1975	19000	425		
	34	25.00/3.5	TL	92.0	750	1975	21200	525		
35/65-33	30	28.00/3.5	TL	97.0	890	2030	21200	425		
	36	28.00/3.5	TL	97.0	890	2030	23600	525		
	42	28.00/3.5	TL	97.0	890	2030	26500	625		
	48	28.00/3.5	TL	97.0	890	2030	29000	725		
45/65-39	36	32.00/4.0	TL	116.0	1140	2410	34500	400		
	46	32.00/4.0	TL	116.0	1140	2410	41250	525		
	58	32.00/4.0	TL	116.0	1140	2410	47500	675		
45/65-45	38	36.00/4.5	TL	116.0	1015	2350	38750	425		
	46	36.00/4.5	TL	116.0	1015	2350	43750	525		
	58	36.00/4.5	TL	116.0	1015	2350	50000	675		



W-6A L-5

- Applications: giant loader in the ore and coal mine sites.
- Extra deep tread producing excellent rock type damage resistance and long tread life.
- Open non-directional tread pattern providing all round traction with excellent self-cleaning.
- Cut Resistant Breaker (CRB) construction providing increased strength and durability without sacrificing heat resistance.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h	10km/h	10km/h	10km/h
50/65-51	68	40.00/4.5	TL	127	1270	2995	64500	650		
67.5/60-51	84	46.00/5.5	TL	137	1690	3520	107300	690		



W-6B L-4

- Applications: loader & earthmover used in the harsh conditions, such as construction and mining areas.
- Extra deep tread and strong casing design providing excellent rock type damage resistance and long tread life in heavy duty.
- Open non-directional tread pattern producing all round traction with excellent self-cleaning.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h	10km/h	10km/h	10km/h
23.5-25	20	19.50/2.5	TL	54.0	595	1615	10900	375		
	24	19.50/2.5	TL	54.0	595	1615	12500	475		
	28	19.50/2.5	TL	54.0	595	1615	13600	550		
26.5-25	24	22.00/3.0	TL	54.0	675	1750	14000	400		
	28	22.00/3.0	TL	54.0	675	1750	15500	475		
	32	22.00/3.0	TL	54.0	675	1750	17000	550		



W-7 L-5S

- Applications: underground load-haul-dump (LHD), shuttle car in rocky harsh conditions of pit lane, tunnel, underground mines
- Extra deep tread depth offering long tread life in extreme conditions
- Smooth or slick tread design providing the maximum rock type damage resistance
- Features Aralon Cut Resistant Breaker (CRB) construction, which provides increased strength and durability without sacrificing heat resistance

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW	OD		10km/h	10km/h
10.00-20	14	8.00	TT/TL	30.5	279	1069	4250	650	
	16	8.00	TT/TL	30.5	279	1069	4600	750	
12.00-20	16	8.50	TT/TL	56.0	315	1145	5450	700	
	20	8.50	TT/TL	56.0	315	1145	6350	875	
	24	8.50	TT/TL	56.0	315	1145	7500	975	
	20	8.50V	TT/TL	56.0	315	1245	6900	925	
12.00-24	24	8.50V	TT/TL	56.0	315	1245	7500	975	
	20	10.00W	TT/TL	63.5	375	1370	8500	700	
14.00-24	24	10.00W	TT/TL	63.5	375	1370	9500	850	
	28	10.00W	TT/TL	63.5	375	1370	10000	925	
	32	10.00W	TT/TL	63.5	375	1370	10900	1050	
	36	10.00W	TT/TL	63.5	375	1370	11400	1100	
16.00-25	28	11.25/2.0	TL	71.0	430	1395	11500	750	
	32	11.25/2.0	TL	71.0	430	1395	12500	875	
	36	11.25/2.0	TL	71.0	430	1395	13600	975	
	40	11.25/2.0	TL	71.0	430	1395	14500	1075	
18.00-25	32	13.00/2.5	TL	78.5	523	1666	15000	750	
	36	13.00/2.5	TL	78.5	523	1666	16000	850	
	40	13.00/2.5	TL	78.5	523	1666	17000	950	
	50	13.00/2.5	TL	78.5	523	1666	19500	1200	
17.5-25	20	14.00/1.5	TL	62.0	445	1350	8250	800	
	24	14.00/1.5	TL	62.0	445	1350	8950	850	
20.5-25	20	17.00/2.0	TL	69.0	520	1490	9500	450	
	24	17.00/2.0	TL	69.0	520	1490	10300	525	
23.5-25	20	19.50/2.5	TL	76.0	595	1615	10900	375	
	24	19.50/2.5	TL	76.0	595	1615	12500	475	
	28	19.50/2.5	TL	76.0	595	1615	13600	550	
26.5-25	36	22.00/3.0	TL	87.5	695	1750	18500	625	
	40	22.00/3.0	TL	87.5	695	1750	19800	750	
	50	22.00/3.0	TL	87.5	695	1750	23500	900	
29.5-25	36	25.00/3.5	TL	95.0	750	1875	21200	550	
	40	25.00/3.5	TL	95.0	750	1875	22500	625	
	50	25.00/3.5	TL	95.0	750	1875	26700	775	
29.5-29	36	25.00/3.5	TL	95.0	750	1975	22000	550	
	40	25.00/3.5	TL	95.0	750	1975	23600	625	
	50	25.00/3.5	TL	95.0	750	1975	26800	775	



W-7A C-1

- Applications: compactor and roller tractor.
- Higher stability, wider contact area, and smooth profile for efficient compaction.
- Special compound providing high heat resistance and longer tire life.
- Low rolling resistance for economy performance.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW	OD		10km/h	10km/h
7.50-15	14	6.00	TT	15.0	215	780	2850	825	
9.00-20	16	7.00	TT	15.0	259	1018	4750	725	
10.00-20	16	7.50	TT	16.0	278	1055	5300	800	
11.00-20	18	8.00	TT	16.0	293	1085	6000	825	
12.00-20	20	8.50	TT	18.0	315	1125	6750	900	
14/70-20	24	12.00	TT	18.0	355	980	3355	300	
13/80-20	18	8.00	TT	18.0	326	1048	5000	900	



W-8 E-7/C-1

- Variable compounds for different pattern and different applications.
- E-7 used in the sandy and desert areas, C-1 for compactor in road construction.
- E-7 special compound producing good resistance to the high temperature.
- Flat and wide foot print suitable for flotation applications on soft soil, orchards, etc.
- Tread specially designed to give minimum ground disturbance.
- Increased tread depth and strong carcass ensuring long life.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW	OD		10km/h*30km/h	10km/h*30km/h
16.00-20	16	10.00W	TT/TL	15.0	420	1370	5650*3150	240*170	
23.1-26	12	DW20	TT/TL	28.0	587	1580	5150*3650	240*170	
	14	DW20	TT/TL	28.0	587	1580	5710*4050	275*200	
24-21	16	DW20	TT/TL	28.0	587	1580	6060*4330	350*230	
	16	18.00/1.5	TT/TL	13.0	610	1370	5600*3875	240*170	
24.00-20.5	16	18.00/0.5	TT/TL	13.0	610	1370	5600*3875	240*170	



W-9

- Applications: forklift vehicles operating in port, airport, factory and warehouse sites, etc.
- Special compound producing good cutting, wear resistances, long lift service.
- Wide and thick tread design providing good ground contact, traction and self-cleaning.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW	OD		Drive*Steer 25km/h	Drive*Steer 25km/h
8.25-15	12	6.50	TT	20.0	235	840	3490*2945	720	
	14	6.50	TT	20.0	235	840	3775*3185	830	
	16	6.50	TT	20.0	235	840	4050*3550	925	
560x165-11	12	4.5x11	TT	16.0	165	560	1675*1000	970	
680x180-15	12	5.0x15	TT	16.0	180	680	2005*1350	860	



W-9A

- Applications: forklift vehicles operating in port, airport, factory and warehouse sites, etc.
- Special compound producing good cutting, wear resistances, long lift service.
- Wide and thick tread design providing good ground contact, traction and self-cleaning.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW	OD		Drive*Steer 25km/h	Drive*Steer 25km/h
7.00-9	10	5.00S	TT	11.0	190	590	1995*1685	860	
8.25-12	12	7.00	TT	15.0	235	765	3060*2585	720	



W-9C

- Applications: forklift vehicles operating in port, airport, factory and warehouse sites, etc.
- Special compound producing good cutting, wear resistances, long lift service.
- Wide and thick tread design providing good ground contact, traction and self-cleaning.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	
					SW	OD		Drive*Steer 25km/h	Drive*Steer 25km/h
5.00-8	8	3.50D	TT	11.0	137	470	1000*845	790	
	10	3.50D	TT	11.0	137	470	1150*970	1000	
6.00-9	10	4.00E	TT	11.0	160	540	1505*1270	860	
6.50-10	10	5.00F	TT	12.0	175	590	1655*1400	790	
7.00-12	12	5.00S	TT	15.0	190	676	2375*2005	860	
8.15-15	12	7.00	TT	18.0	215	704	2790*2355	830	
	14	7.00	TT	18.0	215	704	3050*2575	970	
8.25-15	12	6.50	TT	21.0	235	840	3490*2945	720	
	14	6.50	TT	21.0	235	840	3775*3185	830	
	16	6.50	TT	21.0	235	840	4050*3550	925	
9.00-20	18	7.00	TT	23.0	259	1018	4685*2970	860	
10.00-20 (290/95-20)	18	7.50	TT	24.0	280	1055	5195*3365	860	
	20	7.50	TT	24.0	280	1055	6275*4815	930	
	24	7.50	TT	24.0	280	1055	7385*5670	1025	
12.00-20 (330/95-20)	20	8.50	TT	25.0	315	1125	6835*4200	860	
	24	8.50	TT	25.0	315	1125	7650*4780	930	
	28	8.50	TT	25.0	315	1125	8510*5460	1025	



W-9B

- Applications: forklift vehicles operating in port, airport, factory and warehouse sites, etc.
- Special compound producing good cutting, wear resistances, long lift service
- Wide and thick tread design providing good ground contact, traction and self-cleaning

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	Drive*Steer	25km/h	Drive*Steer	25km/h
5.00-8	8	3.50D	TT	10.0	137	470	1000*845	790		
	10	3.50D	TT	10.0	137	470	1150*970	1000		
18x7-8 (180/70-8)	14	4.33R	TT	10.0	173	465	1505*1270	970		
	16	4.33R	TT	10.0	173	465	1695*1450	1000		
6.00-9	10	4.00E	TT	10.0	160	540	1505*1270	860		
6.50-10	10	5.00F	TT	11.0	175	590	1655*1400	790		
7.00-12	12	5.00S	TT	14.0	190	676	2375*2005	860		
7.00-15	12	5.50F	TT	15.0	200	750	2870*2420	860		
7.50-15	12	6.00	TT	16.0	215	780	3075*2680	790		
7.50-16	12	6.00G	TT	18.0	215	805	3195*2700	790		
	14	6.00G	TT	18.0	215	805	3535*2995	925		
	16	6.00G	TT	18.0	215	805	3875*3280	1000		
8.15-15 (28x9-15)	12	7.00	TT	17.0	215	704	2790*2355	830		
	14	7.00	TT	17.0	215	704	3050*2575	970		
9.00-20	18	7.00	TT	22.0	259	1018	4685*2970	860		
10.00-20 (290/95-20)	18	7.50	TT	23.0	280	1055	5195*3365	860		
	20	7.50	TT	23.0	280	1055	6275*4815	930		
	24	7.50	TT	23.0	280	1055	7385*5670	1025		
12.00-20 (330/95-20)	20	8.50	TT	24.0	315	1125	6835*4200	860		
	24	8.50	TT	24.0	315	1125	7650*4780	930		
	28	8.50	TT	24.0	315	1125	8510*5460	1025		
250-15 (250/70-15)	16	7.50	TT	20.0	250	735	4355*3350	825		
	18	7.50	TT	20.0	250	735	4745*3650	950		
	20	7.50	TT	20.0	250	735	5135*3950	1075		
300-15 (315/70-15)	18	8.00	TT	22.0	300	840	5850*4500	850		
	20	8.00	TT	22.0	300	840	6500*5000	900		



W-10 LS-1/HF-2

- Applications: agricultural and forestry tractor, harvester, petroleum exploration vehicle (vibrator machine) and fuel truck
- Belted Steel construction for the forestry application to produce the puncture proof
- Deeper-tread flotation tires for maximum traction in the toughest conditions
- Special wide-arc design protecting sidewall from cuts and snags
- 23-degree angle bar for good contact and excellent traction

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	40km/h	40km/h	40km/h	40km/h
54x37.00-25	12	32.00	TL	37.0	935	1430	5890	240		
	20	32.00	TL	37.0	935	1430	7660	380		
66x43.00-25	16	36.00	TL	37.0	1050	1700	6100	290		
	20	36.00	TL	37.0	1050	1700	6600	310		



W-10A HF-1

- Applications: monster performance car.
- Low ply rating and low tread depth design lightening tires.
- Super wide tread design and special construction improving the tire stability and casing strength.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	50km/h	50km/h	50km/h	50km/h
66x43.00-25	10	36.00	TL	13.0	1050	1650	4500	170		
	12	36.00	TL	13.0	1050	1650	5000	210		



W-10B E-7/HF-1

- Applications: petroleum exploration vehicle (vibrator machine) and fuel truck.
- Low-sectional tire with super base providing:
 - 1.high traction performance on soft road surface.
 - 2.extreme stability.
 - 3.low tire press on ground lightly without sinking.
 - 4.promotion of the efficiency of off-the-road vehicles.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	40km/h	40km/h	40km/h	40km/h
66x44.00-25	16	36.00	TL	12.0	1075	1720	6150	280		
	20	36.00	TL	12.0	1075	1720	7000	340		
	24	36.00	TL	12.0	1075	1720	7900	380		



W-11 E-7

- Applications: off-road vehicles on sandy and desert areas, as well as paver and compactor machines
- Special compound producing the resistance to extreme high temperature
- Wide tread, round shoulder and streamlined pattern design providing stable ride, good floating force, excellent steering ability and uniform tread wear

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h*50km/h	10km/h*50km/h	10km/h*50km/h	10km/h*50km/h
8.25-16	8	6.00	TT/TL	11.0	240	850	1500*980	250		
9.00-16	8	6.50H	TT/TL	11.0	245	890	1700*975	245		



W-12 E-7

- Applications: off-road vehicles on sandy and desert areas, as well as paver and compactor machines.
- Special compound producing the resistance to extreme high temperature.
- Wide tread, round shoulder and streamlined pattern design providing stable ride, good floating force, excellent steering ability and uniform tread wear.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h*50km/h	10km/h*50km/h	10km/h*50km/h	10km/h*50km/h
16.00-16	6	6.50H	TT/TL	8.0	355	1080	4000*2360	245		
14.00-20	18	7.50V	TT/TL	9.0	375	1220	4125*2360	245		
16.00-20	16	10.00W	TT/TL	15.0	419	1323	5450*3150	245		
24.00-20.5	16	18.00/0.5	TT/TL	16.0	610	1370	5600*3875	240		
24-21	16	18.00/1.5	TT/TL	16.0	610	1370	5600*3875	240		
18.00-25	16	10.00/1.5	TL	14.0	470	1557	7750*4375	245		
29.5-25	28	25.00/3.5	TL	21.0	750	1830	12935*10000	240		
36.00-51	42	26.00/5.0	TL	26.0	990	3075	48000*26500	240		
	50	26.00/5.0	TL	26.0	990	3075	55000*29870	290		
	58	26.00/5.0	TL	26.0	990	3075	61000*33250	350		



W-12A E-7

- Applications: off-road vehicles operating on sandy and desert areas
- Special compound producing the resistance to extreme high temperature
- Wide tread, round shoulder and streamlined pattern design providing stable ride, good floating force, excellent steering ability and uniform tread wear

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	10km/h*50km/h	10km/h*50km/h	10km/h*50km/h	10km/h*50km/h
11.00-16	6	6.50H	TT/TL	8.0	267	935	2060*1180	245		
14.00-20	18	7.50V	TT/TL	9.0	375	1220	4125*2360	245		
21.00-25	16	15.00/3.0	TL	16.0	570	1685	10000*5800	245		
	32	15.00/3.0	TL	16.0	570	1685	15450*9150	450		



W-15 E-3

- Applications: mining truck and fuel truck.
- The tire with heavy-duty nylon body and super-tough surface to be best for mining, building and irrigation project applications.
- Extra-deep and wide pattern reducing sliding risk, enhancing stability and increasing traction force.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg) 70km/h	Inflation Pressure (kpa) 70km/h	
					SW	OD			
11.00-20	18	8.00	TT	22.0	293	1085	3835		910
12.00-20	18	8.50	TT	22.0	315	1125	3940		810
	20	8.50	TT	22.0	315	1125	4200		880
14.00-20	20	10.00	TT/TL	20.0	375	1265	5250		770
	28	10.00	TT/TL	20.0	375	1265	5860		900



W-15A E-3

- Applications: mining truck and fuel truck.
- The tire with heavy-duty nylon body and super-tough surface to be best for mining, building and irrigation project applications.
- Extra-deep and wide pattern reducing sliding risk, enhancing stability and increasing traction force.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg) 70km/h	Inflation Pressure (kpa) 70km/h	
					SW	OD			
14.00-20	20	10.00	TT/TL	20.0	375	1265	5250		770
	28	10.00	TT/TL	20.0	375	1265	5860		900
14.00-25	28	10.00W	TT	25.5	375	1370	5600		650
	30	10.00W	TT	25.5	357	1318	6150		750



W-15B E-3

- Applications: mining truck and fuel truck.
- The tire with heavy-duty nylon body and super-tough surface to be best for mining, building and irrigation project applications.
- Extra-deep and wide pattern reducing sliding risk, enhancing stability and increasing traction force.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg) 70km/h	Inflation Pressure (kpa) 70km/h	
					SW	OD			
11.00-20	18	8.50	TT	22.0	293	1085	3835		910



W-15C E-3

- Applications: mining truck and fuel truck.
- The tire with heavy-duty nylon body and super-tough surface to be best for mining, building and irrigation project applications.
- Extra-deep and wide pattern reducing sliding risk, enhancing stability and increasing traction force.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg) 70km/h	Inflation Pressure (kpa) 70km/h	
					SW	OD			
13.00-25	30	8.5/1.3	TT	22.0	350	1300	5125		750
	32	8.5/1.3	TT	22.0	350	1300	5375		800



W-16XA E-2 NEW

- Applications: MPT and military vehicles, such as tank, armoured car
- All-terrain tire designed for both on and off road applications
- The unique pattern and specail compound producing highway application and abrasion performance
- Reinforced carcass assures strength and durability, improving load capacity

Size	PR	Load Index	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm) SW	OD	Max Load (kg)	Inflation Pressure (kpa)	Max Speed (km/h)
425/85R21	24	173C	533-310	TT	25.0	425	1260	6500	820	60



W-16 E-2

- Applications: MPT and all-terrain vehicles, such as tank, armoured car.
- All-terrain tire designed for both on and off road applications.
- The unique pattern and specail compound producing highway application and abrasion performance.
- Reinforced carcass assures strength and durability, improving load capacity.

Size	PR	Load Index	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	Max Speed (km/h)
						SW	OD			
15.00-20	18	160E	12.00	TT	18.0	405	1310	4500	400	70
	20	164E	12.00	TT	18.0	405	1310	5000	550	70
	22	168E	12.00	TT	18.0	405	1310	5600	700	70
15.00-21	12	154F	11.25	TT	18.0	405	1310	3750	475	80
	14	158G	11.25	TT	18.0	405	1310	4250	475	90



W-16A E-2

- Applications: MPT, for all-terrain vehicle such as truck, bus, trolley-bus, etc, as well as grader, excavator
- All-terrain tire designed for both on and off road applications
- The unique pattern and specail compound producing highway application and abrasion performance
- Reinforced carcass assures strength and durability, improving load capacity

Size	PR	Load Index	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Max Load (kg)	Inflation Pressure (kpa)	Max Speed (km/h)
						SW	OD			
12.00-18	8	124J	8.00	TT	23.0	337	1084	1600	300	100
(320-457)	10	132J	8.00	TT	23.0	337	1084	2000	360	100
	14	138J	8.00	TT	23.0	337	1084	2350	420	100
8.25-20	12	132J	6.50	TT	19.0	228	965	2000	700	100
(240-508)	14	136J	6.50	TT	19.0	228	965	2240	810	100
9.00-20	10	134F	7.00	TT	20.0	255	1018	2120	560	80
(260x508)	14	141F	7.00	TT	20.0	255	1018	2575	770	80
	16	145F	7.00	TT	20.0	255	1018	2900	880	80
12.00-20	18	154J	8.50	TT	22.0	310	1122	3750	810	100
(320-508)	20	156J	8.50	TT	22.0	310	1122	4000	890	100
12.5-20	10	131F	11.00	TT/TL	20.0	370	1145	1950	300	80
(335/80-20)	12	132G	11.00	TT/TL	20.0	370	1145	2000	425	90
	16	141J	11.00	TT/TL	20.0	370	1145	2575	500	100
	18	149J	11.00	TT/TL	20.0	370	1145	3250	650	100
11.00-20	16	149J	8.00	TT	18.5	293	1085	3250	810	90
	18	151J	8.00	TT	18.5	293	1085	3450	880	90
13.00-20	18	156F	10.00	TT	20.0	367	1200	4000	600	90
	20	159F	10.00	TT	20.0	367	1200	4375	700	90
14.00-20	16	153G	10.00	TT	24.0	375	1265	3650	375	90
(370-508)	18	160G	10.00	TT	24.0	375	1265	4500	670	90
	20	164G	10.00	TT	24.0	375	1265	5000	770	90
	28	169G	10.00	TT	24.0	375	1265	5860	900	90
16.00-24	16	160J	11.25	TT	28.0	430	1495	4500	325	100
	24	171J	11.25	TT	28.0	430	1495	6150	475	100
1300x530-533	12	156F	440x533	TT/TL	24.0	530	1300	4050	400	80
(530/70-21)	14	160F	440x533	TT/TL	24.0	530	1300	4500	475	80
	16	162F	440x533	TT/TL	24.0	530	1300	4775	525	80
	20	167F	440x533	TT/TL	24.0	530	1300	5450	570	80
1100X400-533	16	150/46G	21	TT	25.0	380	1100	3800	520	100



W-16B E-2

- Applications: MPT, for all-terrain vehicle such as truck, bus, trolley-bus, etc
- All-terrain tire designed for both on and off road applications
- The unique pattern and specail compound producing highway application and abrasion performance
- Reinforced carcass assures strength and durability, improving load capacity

Size	PR	Load Index	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm) SW	OD	Max Load (kg)	Inflation Pressure (kpa)	Max Speed (km/h)
15.5-20	22	168E	12.00	TT	18.0	425	1260	5600	700	70
16.00-20	10	140E	10.00W	TT	22.0	460	1384	2500	250	70
	20	164E	10.00W	TT	22.0	460	1384	5000	500	70
	28	168E	10.00W	TT	22.0	460	1384	5600	625	70
	32	170E	10.00W	TT	22.0	460	1384	6000	675	70
18.00-24 (500-610)	24	178C	13.00	TT/TL	20.0	500	1600	7500	450	60
1200x500-508 (600/70-508)	16	159F	388x508	TT/TL	23.0	500	1200	4375	500	90
1220x400-533 (400/80-21)	10	142G	310x533	TT/TL	23.0	418	1200	2650	320	90
1500x600-635	14	169G	500x635	TT/TL	25.0	600	1500	5750	380	90
	18	173G	500x635	TT/TL	25.0	600	1500	6500	470	90
	22	176G	500x635	TT/TL	25.0	600	1500	7050	550	90
1600x600-685	24	180F	500x685	TT/TL	27.0	600	1600	8000	440	80
1350x550-533 (550/75-21)	10	173D/160G	440-533	TT	24.0	550	1350	6300	650	90

TRACPRO668 ROW CROP

- Applications: front wheel in Row Crop tractor for cultivation, harvesting and spraying jobs.
- Compared with the bias, the radial design producing much larger load capacity for the modern agricultural machines.
- Lower soil compaction to improve the crop yield.
- Exceptional traction on wet and dry soil.
- Time and fuel saving, improved ride comfort in the field and on the road.

Size	Load Index	Rim	Type	Inflated Dimensions (mm)		Load Capacity		Inflation Pressure		Max Speed		Replacement
				SW	OD	lbs	kg	psi	bar	mph	km/h	
* 230/95R32	128A8/128B	W6	TL	235	1265	3960	1800	58	4.0	25	40	
* 270/95R32	136A8/136B	W9	TL	280	1345	4928	2240	58	4.0	25	40	
* 270/95R36	136D/139A8	W10	TL	284	1410	4928	2240	52	3.6	40	65	11.2R36
* 270/95R38	140A8/140B	W10	TL	285	1480	5500	2500	58	4.0	25	40	
* 270/95R48	144A8/144B	W8	TL	275	1570	6160	2800	58	4.0	25	40	

(* coming soon)

TRACPRO668 IF

- Tires with IF (Improved Flexion) are designed with a very flexible cheek, allowing for a larger internal volume and when lower tire pressure is created, a larger treadmill is created.
- At the same tire pressure, an IF tire can increase to 20% more load compared to regular tires.
- The larger tread provides lower fuel costs and results in minimum soil densification.
- The carcass construction with a steel belt ensures a uniform distribution of ground pressure, leakage protection and a long life of the tread.

Size	Load Index	Rim	Type	Inflated Dimensions (mm)		Load Capacity		Inflation Pressure		Max Speed	
				SW	OD	lbs	kg	psi	bar	mph	km/h
* IF 600/70R30	159D	DW21B	TL	605	1610	9650	4375	23	1.6	40	65
* IF 650/65R38	163D	DW23B	TL	645	1840	10750	4875	23	1.6	40	65
* IF 800/70R38	184A8	DW27B	TL	780	2050	19800	9000	35	2.4	25	40

(* coming soon)

FLPRO360 STEEL BELTED

- Application: spreader, trailer and tanker on and off the road.
- Radial flotation and transport tire with resistant structure providing excellent traction and perfect grip even in bends and when maneuvering.
- The tread pattern design featuring excellent self-cleaning properties in all the conditions of use, and reducing soil compaction preserving the value of the crops.

Size	Load Index	Rim	Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity		Inflation Pressure		Max Speed	
					SW	OD	lbs	kg	psi	bar	mph	km/h
560/60R22.5	161E	AG16.00	TL	26	554	1245	10175	4625	58	4.0	44	70
600/55R26.5	165E	AG20.00	TL	30	624	1350	11330	5150	58	4.0	44	70
* 650/55R26.5	167E	AG20.00	TL	28	645	1360	11990	5450	58	4.0	44	70
* 710/45R22.5	165D	AG24.00	TL	30	727	1210	11330	5150	58	4.0	40	65
710/50R26.5	170D	AG24.00	TL	30	732	1400	13200	6000	58	4.0	40	65
750/60R30.5	181D	AG24.00	TL	30	754	1675	18150	8250	58	4.0	40	65

(* coming soon)

FLR3 R-3

- Applications: combine harvester, spreader, sugar cane machinery, implement, agricultural trailer, tanker.
- Flat and wide foot print suitable for flotation applications on soft soil, orchards, etc.
- Tread specially designed to give minimum ground disturbance.
- Increased tread depth and strong carcass ensures long life.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	40km/h	40km/h	psi	bar
23.1-26	12	DW20	TT/TL	28.0	587	1580	3610	170		
	14	DW20	TT/TL	28.0	587	1580	3970	200		
	16	DW20	TT/TL	28.0	587	1580	4300	230		
23.1-30	12	DW20	TL	17.4	587	1683	3450	160		
	16	DW20	TL	17.4	587	1683	4570	230		
24.5-32	12	DW21	TL	28.0	623	1775	4390	170		
	16	DW21	TL	28.0	623	1775	4994	210		
28L-26	12	DW25B,DW23B	TL	27.0	714	1560	3785	140		
	16	DW25B,DW23B	TL	27.0	714	1560	4605	200		
	20	DW25B,DW23B	TL	27.0	714	1560	5315	280		
30.5L-32	12	DW27	TL	29.0	750	1790	4210	110		
	16	DW27	TL	29.0	750	1790	4745	140		
	20	DW27	TL	29.0	750	1790	5370	170		



IMPT F-3

- Applications: implement machinery, hay harvester, baler, agri-trailer, multipurpose truck.
- Ideal tires for modern farming, suitable for both on and off-the-road applications.
- Low section tires, offering high load capacity with minimum soil compaction & great transportation properties.
- Optimum tread arc delivering fullest possible footprint.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	40km/h	40km/h	psi	bar
6.00-16	6	4.00E	TT/TL	8.0	169	722	560	340		
	8	4.00E	TT/TL	8.0	169	722	875	430		
10.0/80-12	8	9.00	TL	9.0	264	710	1240	310		
	12	9.00	TL	9.0	264	710	1650	390		
	16	9.00	TL	9.0	264	710	2050	490		
10.0/75-15.3	10	9.00	TL	9.0	264	760	1525	390		
	16	9.00	TL	9.0	264	760	2110	525		
11.5/80-15.3	12	9.00	TL	10.0	290	845	2145	410		
	16	9.00	TL	10.0	290	845	2575	475		
	18	9.00	TL	10.0	290	845	2760	510		
12.5/80-15.3	14	9.00	TL	10.0	307	889	2425	410		
	16	9.00	TL	10.0	307	889	2680	450		
	18	9.00	TL	10.0	307	889	2940	475		
12.5/80-18	12	W9	TL	11.0	307	965	2650	370		
	14	W9	TL	11.0	307	965	2910	430		
	16	W9	TL	11.0	307	965	3350	490		
	18	W9	TL	11.0	307	965	4000	550		
13.0/65-18	16	11.00	TL	11.0	336	890	2750	490		
	18	11.00	TL	11.0	336	890	2945	550		



IMPT5 F-3

- Applications: implement machinery, hay harvester, baler, agri-trailer, multipurpose truck.
- Ideal tires for modern farming, suitable for both on and off-the-road applications.
- Low section tires, offering high load capacity with minimum soil compaction & great transportation properties.
- Optimum tread arc delivering fullest possible footprint.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	40km/h	40km/h	psi	bar
15.0/55-17	10	13.00	TL	12.0	391	850	2120	360		
	12	13.00	TL	12.0	391	850	2360	420		
	14	13.00	TL	12.0	391	850	2575	490		
	18	13.00	TL	12.0	391	850	3250	650		



IMPT7 F-3

- Applications: implement machinery, hay harvester, baler, agri-trailer, multipurpose truck.
- Ideal tires for modern farming, suitable for both on and off-the-road applications.
- Low section tires, offering high load capacity with minimum soil compaction & great transportation properties.
- Optimum tread arc delivering fullest possible footprint.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)	
					SW	OD	40km/h	40km/h	psi	bar
19.0/45-17	10	16.00	TL	12.0	491	866	2360	300		
	14	16.00	TL	12.0	491	866	2800	390		
	18	16.00	TL	12.0	491	866	4000	450		
500/50-17	10	16.00	TL	12.0	500	945	2900	270		
	14	16.00	TL	12.0	500	945	3650	380		
	16	16.00	TL	12.0	500	945	3875	440		
	18	16.00	TL	12.0	500	945	4125	480		
400/60-15.5	10	AG13.00	TL	12.0	400	875	2240	360		
	14	AG13.00	TL	12.0	400	875	2725	490		
	18	AG13.00	TL	12.0	400	875	3450	600		

MAXTRAC 100

- Radial agri-tires suitable for high-powered tractors, harvesting and combined machines, carrying very high loads at low pressure
- Large selection of sizes ensuring the perfect fit for your equipment on road and fields, or even difficult and uneven terrain
- The extensive footprint area allowing even ground pressure distribution and minimizing soil compaction, then making TRACPRO668 also suitable for soil preparation, planting and soil treatments
- Comparing with the bias, the flexible strong carcass and the wide deep lugs producing minimal rolling resistance, more traction, lower vibration, higher driving comfort and longer life service
- Maximum resistance to impact and puncturing ensured by the high quality materials used

Size	Load Index	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)	Max Speed (km/h)	Weight (kg)	Logarithm	TT/TL			
					SW	OD									
750/70R26(28.1R26)	158A8	DW24	TL	50	750	1730	4200	160	25	40	302	24	TL		
900/60R42	180D	DW30B	TL	62	881	2147	17636	8000	23	1.6	40	65	302	24	TL

SCI3 I-3



- Applications: agricultural implement & trailer, sugar cane harvester, spreader, both on and off-the-road.
- Flotation implement design for high load capacities at low inflation pressures, minimising soil compaction and preventing damage to crops.

Size	PR	Load Index	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Capacity (kg)	Inflation Pressure (kpa)	Max Speed (km/h)
						SW (mm)	OD (mm)			
400/60-15.5	14	149A8	13.00	TL	25.0	404	875	3725	360	40
	18	158A8	13.00	TL	25.0	404	875	4250	620	40
400/60-22.5 (385/65-22.5)	16	158D	11.75	TL	21.0	400	1070	4250	450	65
	18	164D	11.75	TL	21.0	400	1070	5000	510	65
500/60-22.5	16	163A8	16.00	TL	25.0	500	1172	4875	320	40
500/45-22.5	16	154A8	16.00	TL	25.0	500	1045	3750	360	40
550/45-22.5	16	159A8	16.00	TL	25.0	550	1070	4375	280	40
600/50-22.5	16	165A8	20.00	TL	25.0	600	1170	5150	260	40
	18	168A8	20.00	TL	25.0	600	1170	5600	300	40
	20	176A8	20.00	TL	25.0	600	1170	7100	325	40
600/55-22.5	16	159A8	20.00	TL	25.0	600	1230	5800	260	40
600/55-26.5	16	159A8	20.00	TL	25.0	600	1354	6000	260	40
700/50-26.5	12	169A8	AG24.00	TL	26.0	700	1360	5800	180	40
(710/45-26.5)	16	174A8	AG24.00	TL	26.0	700	1360	6700	240	40
750/60-30.5	16	182A8	AG24.00	TL	25.0	750	1670	8500	220	40



FORESTRY LS-2 STEEL BELTED

- Application: logging skidder machines
- Steel belted construction with heavy duty nylon casing giving puncture proof performance & longer tire life.
- Robust lug design with optimum angle & wider width providing excellent traction.
- Specially designed cut resistance tread compound providing excellent cut & chip resistance under severe terrain conditions.
- Thicker sidewall, stronger bead & rim guard protecting from external damages.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Index A6	Load Capacity (kg)		Inflation Pressure (kpa) 30km/h
					SW (mm)	OD (mm)		30km/h	30km/h	
16.9-30	10	W15L	TT/TL	48.0	429	1510	141	2575	210	
	16	W15L	TT/TL	48.0	429	1510	149	3210	300	
18.4-26	10	DW16A	TT/TL	50.0	465	1475	141	2575	170	
	14	DW16A	TT/TL	50.0	465	1475	146	3000	230	
	16	DW16A	TT/TL	50.0	465	1475	152	3500	280	
18.4-30	10	DW16A	TT/TL	50.0	465	1575	143	2725	170	
	16	DW16A	TT/TL	50.0	465	1575	153	3600	280	
18.4-34	12	DW16A	TT/TL	50.0	465	1680	149	3250	210	
	16	DW16A	TT/TL	50.0	465	1680	154	3700	280	
23.1-26	14	DW20A	TT/TL	53.0	590	1630	157	4125	210	
	16	DW20A	TT/TL	53.0	590	1630	160	4450	240	
24.5-32	16	DH21	TT/TL	55.0	625	1830	164	5000	210	
	20	DH21	TT/TL	55.0	625	1830	169	5800	280	
28L-26	18	DW25A	TT/TL	55.0	715	1645	163	4800	210	
	20	DW25A	TT/TL	55.0	715	1645	165	5150	240	
	26	DW25A	TT/TL	55.0	715	1645	170	6500	340	
30.5L-32	18	DH27	TT/TL	55.0	775	1845	170	5950	210	
	20	DH27	TT/TL	55.0	775	1845	173	6530	240	
	26	DH27	TT/TL	55.0	775	1845	176	7100	280	
	30	DH27	TT/TL	55.0	775	1845	180	8000	320	
DH35.5L-32	20	DH32	TT/TL	58.0	905	2004	173	6530	240	
	26	DH32	TT/TL	58.0	905	2004	183	8750	280	
	30	DH32	TT/TL	58.0	905	2004	198	13100	310	
54x37.00-25	12	32.00	TL	37.0	935	1430	170	5890	240	
	20	32.00	TL	37.0	935	1430	179	7660	380	
66x43.00-25	16	36.00	TL	37.0	1050	1700	171	6100	290	
	20	36.00	TL	37.0	1050	1700	174	6600	310	
73x44.00-32	16	DH36	TL	67.0	1153	1870	175	6900	280	
	20	DH36	TL	67.0	1153	1870	180	8000	340	
Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Index A8	Load Capacity (kg) 40km/h	Inflation Pressure (kpa) 40km/h	
700/70-34	20	DW20B	TL	52.0	725	1850	173A8/180A2	6500	320	
710/70-34	24	DW23B	TL	52.0	754	1850	181A8/188A2	8250	400	



FOREST SPIDER LS-2 STEEL BELTED

- Wider and straighter contact point to give better traction to the tracks
- Perfect support for tracks in every point of the tread and shoulders
- Durable tread, sidewalls and carcass for excellent operating hours

Size	PR	Load Index	Rim	Tube Type	Tread depth (mm)	Inflated Dimensions		Load Index A8	Load Capacity (kg) 40km/h	Inflation Pressure (kpa) 40km/h
						SW (mm)	OD (mm)			
600/55-26.5	20	165A8(172A2)	AG 20.00	TL	40	610	1344	165	5510	500
710/45-26.5	24	173A8/180A2	AG 24.00	TL	35	708	1345	173	6500	600
700/50-26.5	24	173A8/180A2	AG 24.00	TL	35	708	1345	173	6500	600
750/55-26.5	24	182A8/189A2	AG 24.00	TT/TL	35	750	1485	182	8500	600
780/50-28.5	24	182A8/190A2	AG 26.00	TL	35	783	1515	182	8500	600



FOREST MASTER LS-2 STEEL BELTED

- Applications: forestry harvester, forwarder and heavy logging loader.
- Strong carcass with steel belted producing the best resistance to puncture.
- New lug design and wide tread design giving superior traction.
- Perfect design on the tread bars and shoulder offering good self cleaning, side slippage-proof, lateral grip and puncture.
- The reinforced bead and shoulder area coupled with unique tread compound for the excellent service and longer life.

Size	PR	Load Index	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Capacity (kg) 40km/h	Inflation Pressure (kpa) 40km/h	Load Index A8
						SW (mm)	OD (mm)			
500/60-22.5	20	154A8	16.00	TL	35	503	1171	3750	360	154
600/50-22.5	20	159A8/167A2	AG 20.00	TT/TL	42	600	1170	4375	500	159
650/45-22.5	20	154A8/161A2	AG 20.00	TT/TL	45	635	1153	3750	500	154
710/40-22.5 (700/45-22.5)	20	161A8/168A2	AG 24.00	TT/TL	42	710	1170	4625	500	161
710/40-24.5	20	163A8/170A2	AG 24.00	TT/TL	48	710	1230	4875	500	163
500/60-26.5	20	165A8/175A2	AG 16.00	TT/TL	53	485	1265	5150	500	165
600/55-26.5	20	165A8/175A2	AG 20.00	TT/TL	48	601	1340	5150	500	165
710/45-26.5 (700/50-26.5)	20	168A8/175A2	AG 24.00	TT/TL	48	710	1340	5600	550	168
750/55-26.5	24	182A8/189A2	AG 24.00	TT/TL	49	750	1485	8500	600	182
800/40-26.5	20	170A8/177A2	AG 28.00	TT/TL	48	800	1340	6000	500	170
710/55-28.5	24	180A8/187A2	AG 24.00	TT/TL	49	710	1525	8000	600	180
780/50-28.5	24	182A8/190A2	AG 26.00	TT/TL	49	780	1525	8500	600	182



QZ-502

- Applications: tractor front, loader front, mower front.
- Strong nylon carcass ensuring good performance.
- Three-ribs front wheel tires, designed for easy steering.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Capacity (kg) 40km/h	Inflation Pressure (kpa) 40km/h
					SW (mm)	OD (mm)		
6.50-20	8	5.00F	TT	16.0	180	860	865	420



QZ-602 F-2

- Applications: tractor front for field operations and regular transportation.
- Self-cleaning tread for positive steering.
- Sturdy shoulder board offering excellent sidewall protection.
- Wide tread area ensuring longer life.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Index A6	Load Capacity (kg) 30km/h	Inflation Pressure (kpa) 30km/h
					SW (mm)	OD (mm)			
4.00-16	4	3.00D	TT	14.0	110	640	96	280	320
	6	3.00D	TT	14.0	110	640	98	300	340
4.50-16	6	3.00D	TT	14.0	122	655	100	462	450
5.00-15	6	4.00J	TT	14.0	140	665	100	465	420
5.00-16	6	4.00E	TT	15.0	130	655	101	550	420
5.50-16	6	4.00E	TT	15.0	150	710	100	525	370
6.00-16	6	4.00E	TT	15.0	160	740	103	560	340
6.50-16	6	4.50E	TT	16.0	175	760	104	615	310
6.50-20	8	5.00F	TT	16.0	180	860	109	865	420
7.50-16	8	5.50F	TT	20.0	205	810	110	870	370
7.50-18	8	5.50F	TT	22.0	205	860	111	945	370
7.50-20	10	5.50F	TT	22.0	215	928	113	1050	360



QZ-701 R-2

- Applications: tractor for soil tillage and spreading in wet soft fields, such as paddy and shattercane.
- Offering superior grip and enhanced self-cleaning features.
- Tread and sidewall rubber compounds fight off acid and ozone, producing long-life service.
- Strong casing for excellent stability and safety to the operator.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)
					SW	OD	40km/h	40km/h	
11.2-24	8	W10	TT/TL	63.5	285	1105	1225	240	
12.4-24	8	W11	TT/TL	67.0	315	1192	1415	230	
12.4-38	8	W11	TT/TL	67.0	315	1500	1750	230	
13.6-38	8	W12	TT/TL	70.0	345	1600	1910	210	
14.9-24	8	W13	TT/TL	73.0	380	1305	1760	180	
16.9-30	10	W15L	TT/TL	76.0	430	1530	2455	200	
16.9-34	10	W15L	TT/TL	76.0	430	1600	2605	200	
18.4-30	10	W16L	TT/TL	81.0	467	1570	2815	180	
18.4-34	10	W16L	TT/TL	81.0	467	1702	2990	180	
18.4-38	10	W16L	TT/TL	81.0	467	1775	3165	180	
19.5L-24	12	DW16	TT/TL	76.0	495	1357	2145	210	
20.8-38	10	W18L	TT/TL	85.0	530	1855	3475	160	
20.8-42	14	W18A	TT/TL	85.0	528	1988	4500	200	
23.1-26	12	DW20	TT/TL	89.0	587	1662	3610	170	
23.1-30	14	DW20	TT/TL	89.0	587	1770	4210	200	
23.1-34	14	DW21	TT/TL	89.0	587	1870	4450	200	
24.5-32	10	DW21	TT/TL	89.0	623	1832	3570	138	
28L-26	14	DW25	TT/TL	89.0	715	1672	4250	170	



QZ-701A R-2

- Applications: tractor for soil tillage and spreading in wet soft fields, such as paddy and shattercane.
- Extra deep tread specially designed to get excellent traction on wet and sticky soil with excellent self-cleaning properties, preventing mud clogging between the lugs.
- Sidewall rubber preventing weather cracking.
- Tough tread compound to resist fast wear.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)
					SW	OD	40km/h	40km/h	
6.50-16	8	4.50E	TT	65.0	165	830	665	250	
7.50-16	8	5.50F	TT	75.0	195	890	750	250	
8.3-20	8	W7	TT	75.0	210	950	790	270	
8.3-24	8	W7	TT	75.0	210	1050	910	270	
9.5-24	10	W8	TT	75.0	240	1150	1210	320	
11.2-24	10	W10	TT	80.0	285	1205	1380	320	
12.4/11-28	10	W10	TT	85.0	285	1255	1495	280	
12.4-28	10	W11	TT	85.0	315	1315	1745	280	
11-32	10	W10	TT	87.0	305	1460	1080	160	



QZ-702B R-1W

- Applications: tractors in soil tillage operations.
- R-1W pattern ideal for wet and moist soil because of the outstanding self-cleaning properties.
- Extra deep tread lugs as much as 25% deeper than conventional R-1 tyres.
- Also in the harshest operating conditions, excellent traction and extraordinary durability produced.

Size	PR	Load Index	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)	Inflation Pressure (kpa)
9.5-18	8	105A6	W8	TT	44.5	241	900	915	300



QZ-702 R-1

- Applications: tractor, trailer, harvester, spreader, excavator, soil tillage and spraying machines.
- Large selection of sizes ensures the perfect fit for your equipment.
- Dual angled lugs bracing for better traction, more stability and less squirm.
- Dual rubber compounds — flexible rubber on the sidewalls to resist weather cracking plus super-tough rubber on the tread for long wear.
- Bead-and-rim flange protector reducing downtime by keeping out debris.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions (mm)		Load Capacity (kg)		Inflation Pressure (kpa)
					SW	OD	30km/h	30km/h	
5.00-12	4	3.50-B	TT	22.0	145	590	280	200	
6.00-12	6	4.50-B	TT	22.0	165	640	405	250	
6.00-16	6	4.50-E	TT	22.0	165	745	495	250	
7.50-16	8	5.50-F	TT	23.0	205	810	700	240	
5.50-17	8	4.00-E	TT	22.0	165	745	440	250	
7.50-20	8	5.50-F	TT	24.0	205	910	880	280	
8.3-20	6	W7	TT	30.0	210	895	695	240	
	8	W7	TT	30.0	210	895	810	280	
8.3-24	8	W7	TT	30.0	210	995	920	280	
9.5-20	8	W8	TT	33.0	240	950	955	280	
9.5-24	8	W8	TT	30.0	240	1050	1110	280	
11.2-24	8	W10	TT	33.0	285	1105	1225	240	
11.2-28	8	W10	TT	33.0	285	1205	1325	240	
	10	W10	TT	33.0	285	1205	1500	300	
	12	W10	TT	33.0	285	1205	1675	360	
12-38	8	DW11	TT	35.0	330	1575	1570	140	
	10	DW11	TT	35.0	330	1575	1800	220	
12.4-24	6	W11	TT	38.0	315	1160	1200	170	
	8	W11	TT	38.0	315	1160	1415	230	
	10	W11	TT	38.0	315	1160	1630	280	
12.4-28	8	W11	TT	38.0	315	1260	1510	230	
	10	W11	TT	38.0	315	1260	1745	280	
12.4-38	8	W11	TT	38.0	315	1565	1750	230	
	10	W11	TT	38.0	315	1565	2020	280	
13.6-24	8	W12	TT	37.0	345	1210	1545	210	
	10	W12	TT	37.0	345	1210	1790	250	
13.6-28	8	W12	TT	38.0	345	1310	1500	190	
	10	W12	TT	38.0	345	1310	1910	250	
13.6-38	8	W12	TT	36.0	345	1565	1900	210	
	10	W12	TT	36.0	345	1565	2215	250	
14.9-24	8	W13	TT	26.0	378	1265	1760	180	
	10	W13	TT	26.0	378	1265	1990	230	
14.9-26	8	W 13	TT/TL	39.0	378	1315	1820	180	
	10	W 13	TT/TL	39.0	378	1315	2050	230	
14.9-28	8	W13	TT/TL	38.0	380	1365	1880	180	
	10	W13	TT/TL	38.0	380	1365	2120	230	
16.9-24	10	W15L	TT/TL	39.0	430	1335	2230	200	
	12	W15L	TT/TL	39.0	430	1335	2360	260	
16.9-26	10	W15L	TT/TL	39.0	430	1410	2300	200	
	12	W15L	TT/TL	39.0	430	1410	2450	260	
16.9-28	10	W15L	TT/TL	39.0	430	1435	2380	200	
	12	W15L	TT/TL	39.0	430	1435	2655	260	
16.9-30	10	W15L	TT/TL	40.0	430	1485	2455	200	
	12	W15L	TT/TL	40.0	430	1485	2730	240	
16.9-34	8	W15L	TT/TL	39.0	430	1585	2380	170	
	10	W15L	TT/TL	39.0	430	1585	2605	200	
	12	W15L	TT/TL	39.0	430	1585	2820	230	
16.9-38	8	W15L	TT/TL	39.0	430	1685	2520	170	
	10	W15L	TT/TL	39.0	430	1685	2700	200	
	12	W15L	TT/TL	39.0	430	1685	2880	230	
18.4-26	10	DW16	TT/TL	38.0	467	1450	2645	180	
	12	DW16	TT/TL	38.0	467	1450	2985	230	
18.4-28	8	W16L	TT/TL	38.0	467	1500	2130	140	
	10	W16L	TT/TL	38.0	467	1500	2750	180	
	12	W16L	TT/TL	38.0	467	1500	3135	220	
18.4-30	8	W16L	TT/TL	38.0	467	1550	2415	140	
	10	W16L	TT/TL	38.0	467	1550	2815	180	
	12	W16L	TT/TL	38.0	467	1550	3180	230	
18.4-34	8	W16L	TT/TL	38.0	467	1655	2565	140	
	10	W16L	TT/TL	38.0	467	1655	2990	180	
	12	W16L	TT/TL	38.0	467	1655	3375	230	
18.4-38	10	W16L	TT/TL	41.0	467	1755	3165	180	
	12	W16L	TT/TL	41.0	467	1755	3575	230	
	14	W16L	TT/TL	41.0	467	1755	3985	260	
	16	W16L	TT/TL	41.0	467	1755	4395	290	
20.8-38	10	W18L	TT/TL	42.0	530	1835	3475	160	
	12	W18L	TT/TL	42.0	530	1835	4000	200	
23.1-30	12	DW20	TT/TL	42.0	587	1705	3850	170	
	16	DW20	TT/TL	42.0	587	1705	4570	230	
24.5-32	12	DW21	TT/TL	42.0	622	1805	4390	170	
	16	DW21	TT/TL	43.0	622	1805	4994	210	
28L-26	14	DW25A	TT/TL	42.0	715	1615	4250	170	
	16	DW25A	TT/TL	42.0	715	1615	4605	200	

QZ-702A R-1/HF-2



- Applications: combine harvester, high-power tractor, monster truck.
- High flotation capability along with low soil compaction and excellent traction in the field.
- High load capacity to improve modern farmers' requirements in terms of productivity.
- Flexible sidewall rubber compounded with super-tough tread rubber for superior ride, snag resistance and long wear.
- Bead-and-rim flange protector reducing downtime by keeping out debris.
- Compared with QZ-702, more intensive lugs producing larger traction.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions SW (mm) OD	Load Capacity (kg)	Inflation Pressure (kpa)	Max Speed (km/h)
23.1-30	12	DW20	TT/TL	40.0	587 1705	3850	170	30
	16	DW20	TT/TL	40.0	587 1705	4570	230	30
24.5-32	12	DW21	TT/TL	40.0	622 1805	4390	170	30
	16	DW21	TT/TL	40.0	622 1805	4994	210	30
30.5L-32	16	DH27	TT/TL	45.0	775 1820	4745	140	30
	18	DH27	TT/TL	45.0	775 1820	5370	170	30
	20	DH27	TT/TL	45.0	775 1820	5950	210	30
66x43.00-25	10	36.00	TL	38.0	1054 1702	4500	170	40
	12	36.00	TL	38.0	1054 1702	5000	210	40
	16	36.00	TL	38.0	1054 1702	6100	290	40

QZ-702C R-1/HF-2



- Applications: high-powered tractor, and monster truck.
- The high flotation agricultural tires, large ground contact area, low-pressure ratio on the ground and less damage to soil and sapling.
- Tread bars of certain angle give good self-cleaning action, excellent traction and side slippage-proof.
- Deep tread design and cut-resistant tread compound give extended service life.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions SW (mm) OD	Load Capacity (kg)	Inflation Pressure (kpa)
66x43.00-25	10	36.00	TL	38.0	1054 1702	4500	170
	12	36.00	TL	38.0	1054 1702	5000	210
	16	36.00	TL	38.0	1054 1702	6100	290

QZ-702N R-1



- Applications: tractor, harvester, spreader.
- More intensive lugs providing better traction, self-cleaning properties and stability.
- The ideal partner used even on the harshest ground conditions.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions SW (mm) OD	Load Capacity (kg)	Inflation Pressure (kpa)
18.4-42	12	W16L	TT/TL	40.0	467 1857	3000	180
20.8-42	12	W18L	TT/TL	42.0	528 1935	3350	150
23.1-34	10	DW20B,DW20	TT/TL	42.0	602 1799	2900	110
	12	DW20B,DW20	TT/TL	42.0	602 1799	3350	150

QZ-703



- Applications: agricultural implement, tractor trailer, spreader, harvester.
- Designed especially for agricultural machines with load capacity 9-12 tons.
- Tough nylon-cord body for durability and long wear.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions SW (mm) OD	Load Capacity (kg)	Inflation Pressure (kpa)
15.5/65-18	12	W13	TT	15.0	395 980	2890	310
15.5/65-18	12	W13	TT	15.0	395 980	2890	310
16.5/70-18	14	W13	TT	15.0	425 1065	3650	410

QZ-704 F-2



- Applications: 2WD tractor front in soil tillage applications.
- Particularly suitable for all operations requiring a high level of handling.
- Providing high flotation capability contributing to reduce soil compaction.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions SW (mm) OD	Load Capacity (kg)	Inflation Pressure (kpa)
11L-15	8	8.00	TT/TL	21.0	280 810	950	300
10.00-16	10	W8L	TT/TL	16.0	275 910	1325	340
11.00-16	10	W10L	TT/TL	16.0	315 970	1350	345
14L-16.1	10	16.1x11LB	TT/TL	35.0	355 985	1750	280
	12	16.1x11LB	TT/TL	35.0	355 985	1940	340
	16	16.1x11LB	TT/TL	35.0	355 985	2330	500

QZ-705 R-1



- Applications: tractor, harvester, spreader.
- Ideal for use on soft soil, chards and similar applications.
- Specially engineered tread design providing high flotation.
- Increased tread depth and strong carcass ensuring good stability, traction, self-cleaning properties and long service life.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions SW (mm) OD	Load Capacity (kg)	Inflation Pressure (kpa)
23.1-26	12	DW20	TT/TL	34.0	587 1605	3610	170
	14	DW20	TT/TL	34.0	587 1605	3970	200
	16	DW20	TT/TL	34.0	587 1605	4300	230

QZ-706 I-1



- Applications: 2WD tractor front in soil tillage and transport applications.
- This tire ensuring a high level of handling comfort.
- Available in different versions to specifically meet end-user requirements in terms of cut and chip resistance and heavy-duty service.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions SW (mm) OD	Load Capacity (kg)	Inflation Pressure (kpa)
9.00-16	10	6.00F	TT	12.0	235 850	1445	325
10.00-16	10	6.00F	TT	12.0	276 894	1650	320

QZ-707 R-1



- Applications: pivot irrigator.
- Round-shaped lugs to reduce soil damage and protect the precious crops.
- Flexible sidewall dual rubber compounds combined with super-tough tread rubber for long wear and resistance to weather checking.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions SW (mm) OD	Load Capacity (kg)	Inflation Pressure (kpa)
11.2-38	4	W10	TT/TL	30.0	285 1465	950	120

QZ-708 R-1



- Applications: pivot irrigator.
- Round-shaped lugs to reduce soil damage and protect the precious crops.
- Flexible sidewall dual rubber compounds combined with super-tough tread rubber for long wear and resistance to weather checking.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions SW (mm) OD	Load Capacity (kg)	Inflation Pressure (kpa)
11.2-24	4	W10	TT/TL	28.0	285 1105	845	130
	6	W10	TT/TL	28.0	285 1105	1045	180
	8	W10	TT/TL	28.0	285 1105	1225	240
14.9-24	4	W13	TT/TL	30.5	378 1265	1210	100
	6	W13	TT/TL	30.5	378 1265	1510	140
	8	W13	TT/TL	30.5	378 1265	1760	180

QZ-709 I-1



- Applications: harvesting machines, hay baler, bale rack, seeder, windrower, and fertilizer/manure spreader on and off-the-road services.
- Multi rib, low section I-1 tires designed to provide high flotation with minimum soil compaction with excellent load distribution.
- Cut-resistant sidewall reducing downtime, shock-fortified nylon-cord body resisting impacts.
- Specially fortified rubber resisting stubble puncture and tire erosion, and stubble stomper construction available in certain sizes.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		IMP@40km/h		SL IMP@65km/h	
					SW (mm)	OD	Max Load(kg)	Inflation Pressure(kpa)	Max Load(kg)	Inflation Pressure(kpa)
4.00-18	4	3.00D	TT/TL	4.5	112	670	460	275	460	275
5.00-15	4	3.00D	TT/TL	5.5	130	640	430	225	430	225
5.90-15	4	4.50E	TT/TL	6.0	155	665	515	250	515	250
6.00-16	6	4.00E	TT/TL	6.5	158	710	685	275	685	275
6.40-15	6	4.5K	TT/TL	6.5	163	685	670	275	670	275
6.50-16	6	4.50E	TT/TL	7.0	173	735	775	275	775	275
6.70-15	4	4.5K	TT/TL	6.5	170	705	545	195	545	195
	6	4.5K	TT/TL	6.5	170	705	730	275	730	275
7.50-14	4	5.50F	TT/TL	7.5	194	686	615	190	615	190
	6	5.50F	TT/TL	7.5	194	686	805	275	805	275
7.50-16	8	5.50F	TT/TL	6.5	203	808	1100	325	1100	325
7.60-15	8	5.50	TT/TL	6.5	200	721	950	360	950	360
7.50-20	4	5.50F	TT/TL	7.5	203	855	775	150	775	150
	6	5.50F	TT/TL	7.5	203	855	980	225	980	225
	8	5.50F	TT/TL	7.5	203	855	1185	300	1185	300
9.00-10	4	6LB	TT/TL	8.5	235	696	670	170	670	170
	8	6LB	TT/TL	8.5	235	696	860	225	860	225
	12	6LB	TT/TL	8.5	235	696	1070	300	1070	300
9.00-16	8	6LB	TT/TL	8.5	235	850	1315	275	1315	275
	12	6LB	TT/TL	8.5	235	850	1445	300	1445	300
9.00-24	8	W8	TT/TL	8.5	272	1095	1590	250	1590	250
	12	W8	TT/TL	8.5	272	1095	1900	300	1900	300
10.00-15	8	8LB	TT/TL	9.0	276	855	1425	240	1425	240
	12	8LB	TT/TL	9.0	276	855	1550	300	1550	300
10.5/80-18	10	W9-18	TT	6.5	276	885	1950	370	1950	370
	12	W9-18	TT	6.5	276	885	2175	410	2175	410
11.25-24	8	W10	TT/TL	9.5	325	1170	1860	200	1860	200
	12	W10	TT/TL	9.5	325	1170	2360	330	2360	330
11.25-28	8	W10	TT/TL	9.5	325	1275	1925	200	1925	200
	12	W10	TT/TL	9.5	325	1275	2430	330	2430	330
8.5L-14	6	6KB	TT/TL	9.0	215	720	850	220	850	220
	8	6KB	TT/TL	9.0	215	720	1020	300	1020	300
9.5L-14	8	8.00	TT/TL	6.0	239	737	1050	280	1050	280
	12	8.00	TT/TL	6.0	239	737	1360	360	1360	360
9.5L-15	8	8LB	TT/TL	6.0	240	765	1100	280	1100	280
	12	8LB	TT/TL	6.0	240	765	1510	360	1510	360
11L-14	8	8K	TT/TL	6.0	280	752	1080	220	1080	220
	12	8K	TT/TL	6.0	280	752	1390	330	1390	330
11L-15	8	W8L	TT/TL	6.0	280	775	1130	220	1130	220
	12	W8L	TT/TL	6.0	280	775	1465	330	1465	330
11L-16	8	W8L	TT/TL	6.0	275	800	1175	220	1175	220
	12	W8L	TT/TL	6.0	275	800	1505	330	1505	330
12.5L-15	12	10.00	TT/TL	6.0	317	825	1745	330	1745	330
	16	10.00	TT/TL	6.0	317	825	2165	390	2165	390
12.5L-16	12	10.00	TL	10.0	317	850	1800	330	1800	330
	16	10.00	TL	10.0	317	850	2220	390	2220	390

QZ-709A I-1



- Applications: free-rolling wheels used in harvesting machines, hay baler, bale rack, seeder, windrower, and fertilizer/manure spreader.
- Multi rib, low section I-1 tires designed to provide high flotation with minimum soil compaction with excellent load distribution.
- Cut-resistant sidewall reducing downtime, shock-fortified nylon-cord body resisting impacts.
- Specially fortified rubber resisting stubble puncture and tire erosion, and stubble stomper construction available in certain sizes.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Capacity (kg)	Inflation Pressure (kpa)
					SW (mm)	OD		
9.00-16	10	6.00	TT	9.0	234	848	1480	360
20060-145(24x8-14.5)	10	AG 6.75	TT/TL	9.0	210	1785	1050	500
	14	AG 6.75	TT/TL	9.0	210	1785	1150	700
120-18(34070-18)	16	11.00	TL	8.0	342	2688	3670	700

QZ-709B I-1



- Applications: harvesting machines, hay baler, bale rack, seeder, windrower, and fertilizer/manure spreader on and off-the-road services.
- Multi rib, low section I-1 tires designed to provide high flotation with minimum soil compaction with excellent load distribution.
- Specially fortified rubber resisting stubble puncture and tire erosion, and stubble stomper construction available in certain sizes.
- Compared with QZ-709, reinforced cut-resistant sidewall reducing downtime, shock-fortified nylon-cord body resisting impacts.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		IMP@40km/h		SL IMP@65km/h	
					SW (mm)	OD	Max Load(kg)	Inflation Pressure(kpa)	Max Load(kg)	Inflation Pressure(kpa)
12.5L-15	10	10.00	TL	6.0	317	780	1535	280	1230	280
	12	10.00	TL	6.0	317	780	1745	330	1395	330
	16	10.00	TL	6.0	317	780	2165	390	1730	420

QZ-709M I-1



- Applications: tank, wagon and trailer for on and off-the-road services, as well as the steer tires on combine-harvester.
- Multi rib, low section I-1 tires designed to provide high flotation with minimum soil compaction with excellent load distribution.
- Cut-resistant sidewall reducing downtime, shock-fortified nylon-cord body resisting impacts.
- Specially fortified rubber resisting stubble puncture and tire erosion, and stubble stomper construction available in certain sizes.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		IMP@40km/h		SL IMP@65km/h	
					SW (mm)	OD	Max Load(kg)	Inflation Pressure(kpa)	Max Load(kg)	Inflation Pressure(kpa)
14L-16.1	8	16.1x11LB	TT/TL	10.0	355	940	1575	170	1575	170
	10	16.1x11LB	TT/TL	10.0	355	940	1750	230	1750	230
	12	16.1x11LB	TT/TL	10.0	355	940	2090	280	2090	280
	14	16.1x11LB	TT/TL	10.0	355	940	2345	330	2345	330
16.5L-16.1	18	16.1x11LB	TT/TL	10.0	355	940	2855	410	2855	410
	10	16.1x14LB	TT/TL	11.0	420	1025	2360	220	2360	220
	14	16.1x14LB	TT/TL	11.0	420	1025	2900	300	2900	300
	18	16.1x14LB	TT/TL	11.0	420	1025	3330	360	3330	360
19L-16.1	20	16.1x14LB	TT/TL	11.0	420	1025	3500	410	3500	410
	10	16.1x16LB	TT/TL	12.0	483	1085	2725	190	2725	190
	14	16.1x16LB	TT/TL	12.0	483	1085	3175	250	3175	250
	18	16.1x16LB	TT/TL	12.0	483	1085	3625	300	3625	300
21.5L-16.1	20	16.1x16LB	TT/TL	12.0	483	1085	3850	330	3850	330
	10	16.1x18LB	TT/TL	14.0	545	1130	3000	170	3000	170
	14	16.1x18LB	TT/TL	14.0	545	1130	3550	220	3550	220
	18	16.1x18LB	TT/TL	14.0	545	1130	4000	300	4000	300
49-17	20	16.1x18LB	TT/TL	14.0	545	1130	4300	330	4300	330
	20	13.00	TT/TL	11.0	425	1200	3000	375	3000	375
	24	13.00	TT/TL	11.0	425	1200	3300	385	3300	385
	28	13.00	TT/TL	11.0	425	1200	3600	400	3600	400

QZ-710 R-1



- Applications: tractor, harvester, spreader.
- Strong casing to carry heavy loads.
- Dual angled lugs to give better traction in the field and provide comfortable ride on road.
- More tensile lugs providing uniform destruction of load.
- Optimum tread depth and special tread compound for higher mileage.

Size	PR	Load Index	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Capacity (kg)	Inflation Pressure (kpa)
						SW (mm)	OD		
11.2-20	8	114A8	W10	TT	36.0	285	1005	1085	240
15.5-38	8	133A8	W14L	TT	38.0	395	1570	2060	180
	10	137A8	W14L	TT	38.0	395	1570	2320	230
28.1-26	12	158A8	DW24	TT	46.0	750	1750	4245	170
	14	161A8	DW24	TT	46.0	750	1750	4605	200
21.3-24	16	160A8	DW18	TT	30.0	540	1400	4500	280

QZ-711 R-1



- Applications: front wheel in Row Crop tractor for cultivation, harvesting and spraying jobs.
- Round shoulder design for soil and crop protection.
- Optimum lug shapes and angles provide an excellent grip.
- Durable tread rubber compound guaranteeing long lifetime.

Size	PR	Rim	Tube Type	Tread Depth (mm)	Inflated Dimensions		Load Capacity (kg)	Inflation Pressure (kpa)	Load Index A8
					SW (mm)	OD			
9.5-32	8	W8	TT	28.0	240	1250	1260	280	116
9.5-42	6	W8	TL	32.0	241	1505	1090	300	111
9.5-42	6	W8	TT	32.0	241	1505	1090	300	111



PNST9

- Applications: lifter or forklift in tough working conditions
- Super strong pneumatic solid tire improving load capacity and resistance to puncture, extend service life safety of the workplace and personnel
- PNST01-W tires with white-colored rubber formula to eliminate the marking issue on the ground to avoid polluting the operating environment


Size	Rim	Section Width (mm)	Overall Diameter (mm)	Load Capacity/Balance Forklift (kg)						Other Forklift (kg)	Drive Width (mm)
				10km/h		16km/h		26km/h			
				Dirve	Steer	Dirve	Steer	Dirve	Steer		
15x4.5-8	3.00	110	376	905	725	675	655	805	605	625	104
5.00-8	3.00	125	457	1210	970	1175	880	1095	820	840	117
16x6-8	4.33	152	412	1500	1200	1445	1085	1345	1010	1035	145
18x7-8	4.33	160	457	2350	1880	2265	1700	2110	1585	1620	150
6.00-9	4.00	148	528	1920	1535	1855	1390	1730	1295	1325	138
21x8-9	6.00	194	518	2810	2250	2715	2035	2530	1895	1940	185
6.50-10	5.00	168	572	2840	2110	2545	1910	2370	1780	1820	154
23x9-10	6.50	208	577	4005	3205	3845	2885	3605	2705	2765	198
200/50-10	6.50	196	455	2370	1900	2290	1720	2135	1605	1630	186
7.00-12	5.00	178	654	3015	2410	2910	2185	2710	2035	2075	165
23x10-12	8.00	230	590	3980	3420	3820	3210	3586	3010	2980	219
7.00-15	5.50	190	714	3590	2870	3465	2600	3225	2420	2475	178
28x9-15	7.00	219	691	4090	3270	3945	2960	3675	3755	2820	207
8.25-15	6.50	210	818	4940	3950	4765	3575	4440	3330	3045	199
250-15	7.50	234	724	4366	3400	4220	3160	3930	2955	3010	222
300-15	8.00	264	819	5990	4700	5780	4335	5380	4037	4130	251
12.00-20	8.0/8.5	302	1090								281



POSTR

- Applications: lifter or forklift in tough working conditions
- Super strong press-on band solid tire with special compounds improving load capacity and resistance to puncture, extend service life
- Special colloidal anti-static formula to do the effective elimination of static accumulation, improving the safety of the workplace and personnel

Size		Size				Other forklifts(kg)
inch	mm	10km/h		16km/h		
		Drive	Steer	Drive	Steer	16km/h
14X4 1/2X8	355.6X114.3X203.2	1090	970	1040	960	840
15 1/2X5X10	393.7X127X254	1360	1210	1300	1200	1050
16X5X10 1/2	406.4X127X266.7	1400	1250	1340	1240	1080
16X6X10 1/2	406.4X152.4X266.7	1780	1580	1700	1570	1370
16 1/4X5X11 1/4	412.8X127X285.8	1415	1260	1390	1290	1110
16 1/4X6X11 1/4	412.8X152.4X285.8	1800	1630	1750	1620	1420
18X5X12 1/8	457.2X127X308	1530	1360	1460	1350	1170
18X6X12 1/8	457.2X152.4X308	1950	1740	1860	1720	1500
18X7X12 1/8	457.2X177.8X308	2370	2110	2270	2100	1820
18X9X12 1/8	457.2X228.6X308	3210	2850	3070	2840	2470
20X8X16	508X203.2X406.4	2790	2480	2670	2470	2150
21X7X15	533.4X177.8X381	2670	2380	2550	2360	2050
21X8X15	533.4X203.2X381	3140	2795	3000	2780	2420
22X8X16	558.8X203.2X406.4	3260	2900	3110	2880	2505
22X9X16	558.8X228.6X406.4	3700	3340	3590	3320	2890

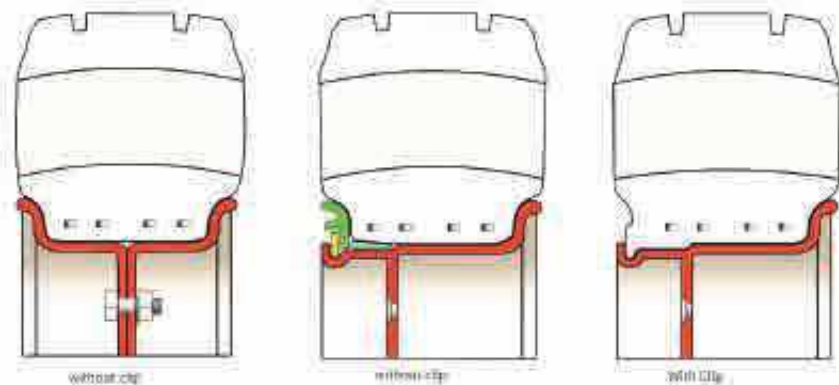

PNST6/PNST6-W

- Applications: lifter or forklift in tough working conditions.
- Super strong pneumatic solid tire improving load capacity and resistance to puncture, extend service life.
- Special colloidal anti-static formula to do the effective elimination of static accumulation, improving the safety of the workplace and personnel.
- PNST6-W tires with light-colored rubber formula to eliminate the marking issue on the ground to avoid polluting the operating environment.

Size	Rim	Section Width (mm)	Overall Diameter (mm)	Load Capacity/Balance Forklift (kg)						Other Forklifts (kg)	Weight kg
				10km/h		16km/h		26km/h			
				Dirve	Steer	Dirve	Steer	Dirve	Steer		
5.00-8	3.00	125	455	1210	970	1175	880	1095	820	840	18.0
6.00-9	4.00	143	514	1920	1535	1855	1390	1730	1295	1325	27.8
6.50-10	5.00	153	566	2840	2110	2545	1910	2370	1780	1820	36.6
7.00-9	5.00	157	536	2370	2015	2805	1925	2370	1750	1785	32.2
7.00-12	5.00	176	643	3015	2410	2910	2185	2710	2035	2075	45.0
8.15-15 (28x9-15)	7.00	208	691	4090	3270	3945	2960	3675	2755	2820	63.0
8.25-12	5.00	189	696	3326	2660	3215	2410	2995	2245	2295	64.6
8.25-15	6.50	204	810	4940	3950	4765	3575	4440	3330	3045	86.8
250-15 (250/70-15)	7.50	228	693	4366	3400	4220	3160	3930	2955	3010	66.0
300-15 (315/70-15)	8.00	238	788	5990	4700	5780	4335	5380	4037	4130	99.0
18x7-8 (180/70-8)	4.33	155	440	2350	1880	2265	1700	2110	1585	1620	20.8
15x4 1/2-8	3.00	109	307	905	725	675	655	805	605	625	9.6



PNSKS

- Applications: skid steer, lifter or forklift in tough working conditions.
- Solid skid steer tire with special design to eliminate the shock effect and reduce the wear and tear of the vehicle.
- Special casing design to reduce tire weights and save power.
- Special colloidal anti-static formula to do the effective elimination of static accumulation, improving the safety of the workplace and personnel.

Size with Rim	Size without Rim	Raplacing Size	Standard Rim	Section Width	Overall Diameter	Load @10km/h	Weight
				mm	mm	Kg	Kg
31*6*10	31x10-20 30x10-16	10-16.5	7.50-20	235	740	3415	100.2
33*6*11	33x12-20	12-16.5	7.50-20	276	838	4075	125.0
36*7*11	36x14-20	14-17.5	7.50-20	276	914	5650	178.0
40*9*13	40x15-20	15-19.5	7.50-20	336	1016	7545	275.0
38*7*13	16/70-20		13.00	330	960	6320	208.0


ONE STOP SHOP



ADDITIONAL SOLUTIONS FOR YOUR VEHICLES

Using and Maintenance of Tires


- Scope:**
The basic requirements of the transport, storage, assembly and disassembly, pressure, load, maintenance of tires are stipulated in this regulation. This regulation is suitable to all kinds of tires products of QQR.
- Quoted standards:**
GB/T 2977-1997 "Truck tires series"
GB/T 9768-2000 "The regulation of usage and maintenance of tires"
GB/T 521-1993 "The overall measurement method of tires"
- Transport of tire**
 - Tire must be placed vertically when they are transported (tube tires should be inflated slightly), and it is not allowed to place tires together with oil, inflammable objects and other chemical objects, and the tire should be kept from direct sunlight or rain. When the tube is not packed separately, it should be placed in tire and inflated slightly in order to keep touch with the internal edge of tire and tie by rope more than two places.
 - Do not dismantle bead protection device and steel belt to avoid any injury to bead when transporting wrapped tubeless tire.
 - It is not allowed to hang the tire directly by rope, tackle. The non-metal broad ribbon is permitted (see figure 1)
 - When using forklift to handle a tire, use fork to lift up the tire from its side, do not lift it up by inserting the fork into bead central hole (see figure 2)




- Storage of tire**
 - Tires should be stored in good ventilated warehouse and kept from direct sunlight. The temperature in the warehouse should be controlled between 100C~+300C and the relative humidity should be between 50% and 80%. The warehouse should be 1 meter from heat source, generating equipment and other ozone-generating place.
 - It is not allowed to place tires together with oils, inflammable objects, acids and chemical objects.
 - To store the internal tubes and hung on half-circular shelves and the tires should be changed regularly the surface of the internal tubes and hung on half-circular shelves and the tires should be changed regularly the pivot point, at least once two months. It is not allowed to fold and pile them. To store the flaps specifically, it should be placed on circular wooden shelves.
 - Tires should be stored in lots according to production date or store date, first in and first out. Meanwhile, they should have store card to record the type, specification, structure, ply rating, brand, production date and store date.
- Wrapped tires should be stored with packages.

- Assembling and disassembling of tire**
 - Tires should be fixed on corresponding rims of stipulating in regulation.
 - The same axle should be assembled with tires of the same specifications, structure, brands, size, ply rating and patterns.
 - When fitting tires which have specified running direction, the running direction should be the same with the running direction to wheel.
 - All tires of vehicles or the same axle should be replaced when replacing with new ones.
 - When assembling or disassembling the tube tires, it should use the special tools.
 - When tubes are placed into tires, the dirt should be cleaned from the internal of the tires and the surface of tube, and apply some powder on the surface of the internal tube for their extent. The position of internal tube valve and rim valves and rim valves should be kept together.
 - Assembly and disassembly to tubeless tires
 - Before amount tires, rim should be checked firstly for changing figure and crack. If there are some problems, rim should be repaired or replaced. The rust and other things should be cleaned from the surface of rim and tires' base and "O" circle groove before amounting tires.
 - When dismantling or installing tires with O-ring rims, need to make replacement with new O-ring. Before installing tires, check if O-ring have defects and smear lubricant.
 - The bead disassembly machine and the tire assembly device should be used before mount or dismount tires. It is not allowed to jimmy and pound forcefully in order to avoiding damage the seal layer in tire and bead. For the convenience of mounting tires, it is advisable to apply neutral soap liquid or special antifricition on bottom of bead and the rim. It is not allowed to use any antifricition that can influence the quality of tires.

- Table of two tires' outside diameter permitted difference value range when off-the-road twin tires are installed side by side.**
- Load of tire**
 - The load of tires should be suit with the current national standard.
 - The goods loaded by vehicle should be placed equably in order to avoid one tire takes too much load (see figure 3 and figure4)



- Check air pressure at fixed time everyday, when finding air pressure reduction, add to standard air pressure in time.
- Using pressure of tire**
 - The using pressure of tire should be suit with the current national standard .
 - After mounting tires, tubes should be inflated slightly firstly to make sure it can extend, then kept inflating till the pressure meets the regulation.
 - It is necessary to inspect if there is a leakage in the place of the valve pad and the valve rim touching with tire after inflating the tire.
- The usage of tire**
 - The usage of tire
 - If you do not operate a vehicle for more than half year, please leave it in garage and jack it up.
 - The vehicle should be avoided violent acceleration and emergent brake to prevent from the damage of tires.
 - If the vehicle is operated at high-speed for long distance or in summer, it is necessary to check the regularly and increase the stop times. If the tire needs inflating, it must be done after decreasing the temperature of tire. If the tire becomes hot and the internal pressure is increasing, the vehicle should be stopped for releasing warm but not be emitted pressure and not be sprinkled cool water on it.
 - When chain up tires, both sides should be chained. Take it off if chains are not necessary.
 - It is necessary to change the toe-in of the front tire for different vehicles when mounting the bias tires.
 - As soon as you find a radial tire pierced you should take it off from vehicle to repair so as to prevent moisture getting into carcass, eroding steel cord and resulting in separation.
 - Radial tires must strictly keep standard inflation pressure. Because of the reason of their structure, their subside level and contacting surface are bigger. Compared with the bias tires, they are considered as inadequate inflation usually, so it is necessary to check with barometer.
- Maintenance of tire**
 - Tires should be made first class maintenance with the vehicle. The main missions are to check inflation, wear of tire surface and clean the stone and dirt and from the groove of pattern. To check if the tire is mounted well and if the rim, fender circle and lock ring are well.
 - Tire should be made second-class maintenance with the vehicle. If the outside tires have outside damages, decorations or bulges. If the inner tubes have aging and damage appearances and the flaps have rift. The appeared problems should be recorded and resolved immediately. The measurement of the change of tire treads wire, overall diameter and section width should be made as per GB/T521. These should be recorded and rotate the tires.
 - The tires should be rotated regularly as per appendix A(standard appendix). When running 1200km-1500km, the rotation should be made and balancing the tires.
 - Rotation of truck bias tire
The truck bias tires should be rotated regularly as per appendix A(standard appendix). When running 8000km-10000km, the rotation should be made and balancing the tire.
 - It is necessary to use tires without pollution of old and other chemical materials in order to avoid tires' aging.
 - Rotation of agricultural tires
When agricultural tire finish a ride for a specific time(one season) , rotate left tire with right tire, keep record of use, installing and dismantling, damage.
 - Rotation of off-the-road tire
Combine vehicle's grade-2 maintenance to conduct cross rotation of heavy-duty dump truck tires.
 - Nominal sectional width of off-the-road tire are within the limits of 18.00-36.00, when one third of pattern depth of front wheel tire wears off, rotate the front wheel tire with rear wheel tire. When outer diameter difference value of rear wheel coaxial twin tires installed side by side is 10mm to 18mm, make rotation between twin tires' inside tire and outside tire. Avoid to be polluted by oils and chemical articles on the ground, prevent tire too early aging.
- Repair tire**
 - The tires should often be checked. As soon as the damages are found, they must be repaired immediately
 - The tires should be stopped using when the tires wear to wear mark.
 - The retreaded tires should not be used as steering tire in order for security of the vehicle.
 - Pay attention to the protection of tires, remove rust from tire's rim and smear antirust paint at regular intervals.

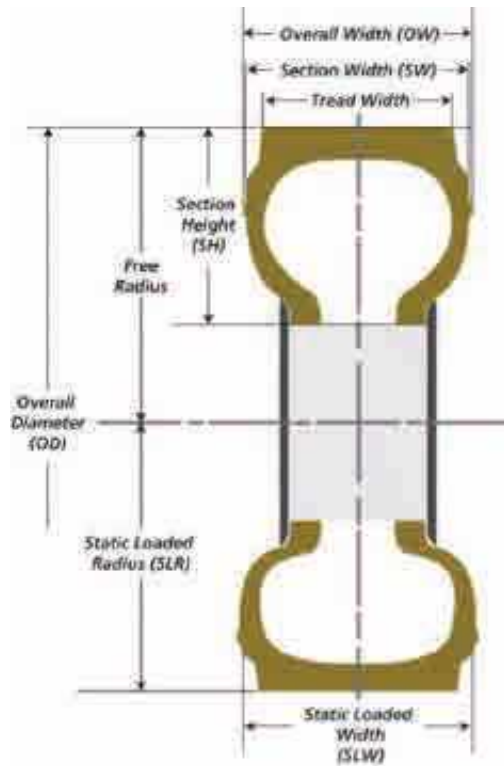

General Information

Load Index

The LOAD INDEX is a numerical code with the maximum carrying load capacity.

Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS
120	1400	3085	148	3150	6940	176	7100	5700	204	16000	35300
121	1450	3495	149	3250	7160	177	7300	16100	205	16500	36400
122	1500	3305	150	3350	7390	178	7500	16500	206	17000	37500
123	1550	3415	151	3450	7610	179	7750	17100	207	17500	38600
124	1600	3525	152	3550	7830	180	8000	17600	208	18000	39700
125	1650	3640	153	3650	8050	181	8250	18200	209	18500	40800
126	1700	3750	154	3750	8270	182	8500	18700	210	19000	41900
127	1750	3860	155	3875	8540	183	8750	19300	211	19500	43000
128	1800	3970	156	4000	8820	184	9000	19800	212	20000	44100
129	1850	4080	157	4125	9090	185	9250	20400	213	20600	45400
130	1900	4190	158	4250	9370	186	9500	20900	214	21200	46700
131	1950	4300	159	4375	9650	187	9750	21500	215	21800	48100
132	2000	4410	160	4500	9920	188	10000	22000	216	22400	49400
133	2060	4540	161	4625	10200	189	10300	22700	217	23000	50700
134	2120	4675	162	4750	10500	190	10600	23400	218	23600	52000
135	2180	4805	163	4875	10700	191	10900	24000	219	24300	53600
136	2240	4940	164	5000	11000	192	11200	24700	220	25000	55100
137	2300	5070	165	5150	11400	193	11500	25400	221	25750	56800
138	2360	5205	166	5300	11700	194	11800	26000	222	26500	58400
139	2430	5355	167	5450	12000	195	12150	26800	223	27250	60100
140	2500	5510	168	5600	12300	196	12500	27600	224	28000	61700
141	2575	5675	169	5800	12800	197	12850	28300	225	29000	63900
142	2650	5840	170	6000	13200	198	13200	29100	226	30000	66100
143	2725	6005	171	6150	13600	199	13600	30000	227	30750	67800
144	2800	6175	172	6300	13900	200	14000	30900	228	31500	69400
145	2900	6395	173	6500	14300	201	14500	32000	229	32500	71700
146	3000	6610	174	6700	14800	202	15000	33100	230	33500	73900
147	3075	6780	175	6900	15200	203	15500	34200	231	34500	76100

Speed Symbol

The SPEED SYMBOL indicates the speed at which the tire can carry a load corresponding to its Load Index under service specified conditions.

Speed Symbol	Speed(km/h)	Speed Symbol	Speed(km/h)
A1	5	B	50
A2	10	C	80
A3	15	D	100
A4	20	E	120
A5	25	F	150
A6	30	G	180
A7	35		
A8	40		